

Mats

We are ISO 9001 certified

Materials



Natural rubber: Ideal for dry and wet work environment, optimum slip resistance. Temperature range: -50°C up to +100°C



Styrene-Butadiene-Rubber is a synthetic rubber copolymer consisting of styrene and butadiene. It has good abrasion resistance and good aging stability when protected by additives. Sensitive to oil and ozone. Temperature range: around -40°C up to +100 °C.



Nitrile rubber
Resistant to oils and many chemicals, acids and alkalines. Suitable for working places in the food and chemical industry. Temperature range: -30°C up to +110°C



Fire behaviour:
B1, B_n-s1 or C_n-s1
Suitable for contact with hot metal chips. Temperature range: -30°C up to +150°C



EPDM rubber
Suitable for outside and extreme temperature. Temperature range: -50°C up to +150°C



Antistatic properties:
R_G10⁶-10⁷ Ohm DIN EN 61340-4-1
Electrically dissipative.



Anti-fungal
Suitable for use in permanently wet or damp conditions, i.e. swimming bath and saunas or areas where fungal attacks are expected. Temperature range: -50°C up to +150°C

Rubber items

shown in this catalogue are made of natural rubber if not mentioned otherwise. Other materials maybe used: i.e. nitrile rubber, EPDM rubber, chloroprene-rubber. This as well as different colour options have to be mentioned in your order.

Delivery Options



Roll form Products are available only in roll form or in roll form as an option.



Cut-to-size
Upon request, mats can be cut to any size or shape. Enquire for the square meter price.



With puzzle edges
These mat and floor coverings are available with interlocking puzzle edges, so a whole area can be covered. These mats are also alternatively available with 1-, 2-, 3- or 4 sides with puzzle edges combined with sloped or straight edges.



Other colours available
Offered products are available in other colours. Refer to the minimum quantity requirement



Space saver
Ideal for large sized mats (i.e. 150 cm x 100 cm). Can be supplied in rolls without plastic packing. Pre-cut lengths of offered rolls can be supplied ready-to- sell. Cardboard display box is optional

Display stands

Specially designed stands with display boards to store and display rubber, coir and other mats and rolls for sale, as seen on page 86.

User Areas

Anti Fatigue Mats
Available in different Shore hardness, with yellow sloped edges or in various materials. Sanipa and Diamant mats have been tested by the Federal Offices for Work Protection and Working Medicine and have been classified as optimum mats to release

Each footstep during standing or walking releases a weight force of up to 200 kg. This is normally distributed up the heels to the leg muscles and up to the spinal column. To this weight impact, the human body reacts with pain and fatigue, which will eventually lead to spinal column and joint disorders and also to a decline in worker productivity.



Industrial



Suitable for use with wheels, trolleys etc.



Staircases



Automotive industry



Decks



Welding station



Wet and oily environments



Ski slopes



Circuit manufacture



Slopes



Mining areas



Wooden hard flooring



High voltage area



Behind counters



Hallway



Beauty parlours



Train stations



Laboratories



Airports



Electrical distribution places



Computer rooms



Hospitals



Service stations



Swimming pool



Fire hazard areas



For use with animals



Play areas

Service

- Business hours are Monday to Friday from 7.00 – 18.00 h
- Express delivery at additional cost
- Colour and quality samples are available free of charge.

Actual product colours may vary from the shown catalogue pictures due to printing process. The indicated RAL-colours may also vary from the actual product colours.

Technical amendments possible without prior notifications.

Weight information are approximate figures.

Copyright © Sänger GmbH 7/2017

Contents

Mats for Foyer, Household, Industry and Objects

Coir Mats

Coir Brush Mats, machine woven	4 -11
Coir Wire Brush Mats	12
Coir Products	12
Coir Wire Animal Boot Scrapers	13
Coir Brush Rolls	14
Sports Flooring Tiles	15

Rubber Mats

STIFT®	16
OKTA®	17
QUARTA®	17

Stair Protectors

PRIMA® Rubber Stair Protectors	18
Rubber Stud Stair Tread SGN	31

Cleaning Mats

LEOPARD	20
PUMA	21
TIGER	22
DRAGON	23
LION	24
PRIMA® Aluminium Cleaning	25

Various Mats

INTUITION	19
NUDEL-Mats	27
Gym-Mats	40
Gymnastic-Mats	50
Rubber Underlay Mat	66

Rolls

Coir Brush Rolls	14
Cleaning Mats LEOPARD	20
Cleaning Mats TIGER	22
Cleaning Mats DRAGON	23
Cleaning Mats LION	24
Wave Mats	28
NUDEL-Mats	27
PRIMA® Rubber Rolls Pool Mat	43
PRIMA® Rubber Rolls	41-42, 44
PRIMA® Roll Synthetic	45
Gymnastic-Mats	50
Workplace Mat JOLLY	57

Rubber Flooring

Medium Round Stud KN	29
Smooth Large Round Stud GN	30
Rubber Stud Stair Tread SGN	31
Smooth Surface GU	32
Smooth Surface with Chips GG	33
Hammerblow Surface HU	34
Hammerblow Surface, with Chips HG	35
Small Round Studs MN	36
Square Studs QN	37
Sports & Recreational Flooring	38-39

Garden- and Landscaping

Paver

PRIMA® Paver Bone Shape	46
Rubber Dog Bone Paver	47
PRIMA® Paver Quart	48
PRIMA® Paver Hexagon Shape	49
PRIMA® Paver Bottle Shape	49
Artificial Grass Carpets	51
Ground Protection Mat	63

Workplace

PRIMA® Rubber Rolls	41-43, 44
---------------------	-----------

Workplace Mats

Rubber Anti-Fatigue Mat	51
Sanipa	53
Diamant	54
OKTA®	17
QUARTA®	17
NOVA®	55-56
JOLLY	57
BELLA/SANO	57
CONDOR	58
MARMOR TOP	59
Rubber Ramps	61

Work Surface

Chair Mats	60
------------	----

Hygienic

Hygienic Shoe Disinfectant Mat	52
--------------------------------	----

Equestrian

Rubber Stable Mat	64
Wall Protector for Stables and Trailers	64
OKTA®	64
Ramp Covers	65
Trailer Flooring	65
PRIMA® Roll Universal	65

Sports Flooring

Sports & Recreational Flooring	38
SB 6, SB 12	
Ice Skating Rink Flooring SR	39
Gym Mats	40
Gymnastic-Mats	50

Vehicles

Cable Hump	62
Speed Humps	62
Dock Bumpers	62
Ground Protection Mat	63

Various Products

Boot Trays	26
Rubber Ramps	61
Technical Rubber Products	67
Accustic Insulation System	68
Roofing sheet	68

Coir Brush Mats

machine woven



Coir Brush Mats with stenciled motives

Premium quality machine woven mats from our own production:

- Pure natural renewable resources: Coir fibre, jute and natural latex
- tightly woven, heavy duty
- very good water absorption
- for indoor and outdoor use
- edges are rubber sealed
- printing motives stenciled with UV-resistant, water based paint made of natural colour pigments

Dimensions: 59 x 39 cm
Thickness: 20 mm

- 1 Coir Brush Mat, cat Miau**
Art.-No. 14 808
- 2 Coir Brush Mat, purple flowers**
Art.-No. 14 852
- 3 Coir Brush Mat, slippers**
Art.-No. 14 874
- 4 Coir Brush Mat, coloured stripes**
Art.-No. 14 872

Dimensions: 59 x 35 cm

- 5 Coir Velour Mat**
Art.-No. 12 302

Packing: 10 pieces



Underside: Machine woven

Slip resistant edge made of natural latex



Coir Brush Mats

machine woven



Dimensions: 59 x 39 cm
Thickness: 20 mm

- 1 Mosaik purple**
Art.-No. 14 864
- 2 Waves**
Art.-No. 14 873
- 3 Butterfly**
Art.-No. 14 853
- 4 Rectangle design red**
Art.-No. 12 350
- 5 3 leaves**
Art.-No. 12 913
- 6 Dog**
Art.-No. 12 338
- 7 Apple**
Art.-No. 12 331
- 8 Elephant**
Art.-No. 12 904
- 9 America**
Art.-No. 12 902

Packing: 10 pieces



Coir Brush Mats

machine woven



Dimensions: 70 x 45 cm
Thickness: 20 mm

- 1 Geometrie**
Art.-No. 14 804
- 2 Fern**
Art.-No. 14 806
- 3 Roses**
Art.-No. 14 805
- 4 Stripes black/green**
Art.-No. 14 807
- 5 Flower garden**
Art.-No. 14 862
- 6 Red apples**
Art.-No. 14 802
- 7 Flower pots**
Art.-No. 12 882

Packing: 10 pieces



Coir Brush Mats

machine woven



Dimensions: 75 x 45 cm
Thickness: 20 mm

- 1 Circles and squares**
Art.-No. 12 351
- 2 Flowers with frame**
Art.-No. 12 926
- 3 Semi-circular, natural**
Art.-No. 12 346
- 4 Tulip pot**
Art.-No. 12 870
- 5 Corn vase**
Art.-No. 12 897
- 6 Lemon**
Art.-No. 12 899
- 7 Leaves**
Art.-No. 12 873

Packing: 10 pieces



Coir Brush Mats with colour printed motives
Additional rib design increases the effectiveness of the mat and provides extra space for dirt collection.



Coir Brush Mats

machine woven



Dimensions: 70 x 40 cm, semi-circular
Thickness: 20 mm



1 3 Flower pots

Art.-No. 14 809

Dimensions: 70 x 45 cm, semi-circular

2 Grapevine

Art.-No. 12 347

3 Flowers

Art.-No. 12 352

4 Circle border line

Art.-No. 12 893

5 Flower creeper

Art.-No. 12 927

6 Twine

Art.-No. 12 928

Packing: 10 pieces



Coir Brush Mats
with colour printed motives
Additional rib design increases the effectiveness of the mat and provides extra space for dirt collection.



EXTRA BIG

Dimensions: 80 x 35 cm
Thickness: 20 mm

1 Poppy field

Art.-No. 14 818

Dimensions: 79 x 39 cm

2 4 leaves

Art.-No. 14 841

Packing: 10 pieces



Dimensions: 120 x 45 cm
Thickness: 20 mm

1 5 trees

Art.-No. 14 810

2 Squares

Art.-No. 14 811



Coir Brush Mats

machine woven



1 Garden equipent, green

Art.-Nr. 14 869

2 Garden equipent, black

Art.-No. 14 868

3 White circles

Art.-No. 12 866

4 Boleafs

Art.-No. 12 865




5 Stars

Art.-No. 12 877

6 Leaf climber

Art.-No. 12 876

Packing: 10 pieces

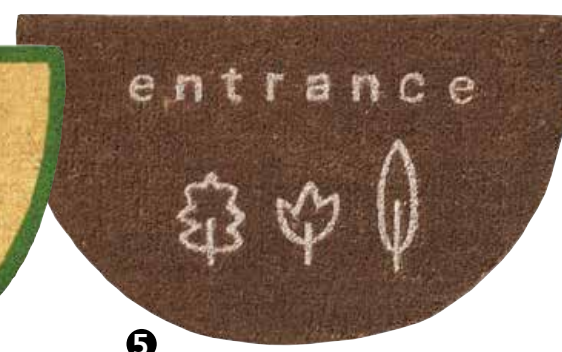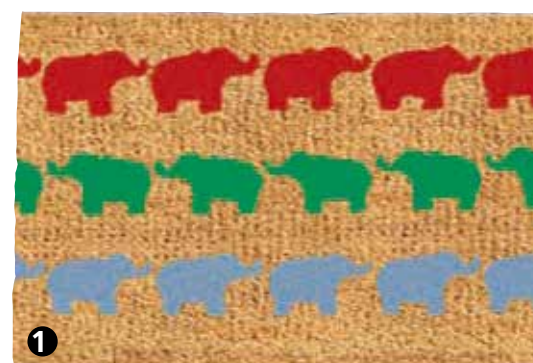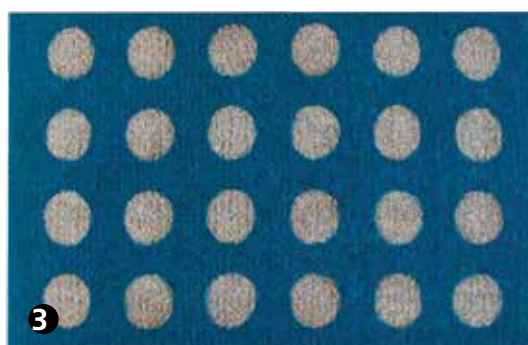

1 3 rows of elephants

Art.-Nr. 12 884

2 Strawberry, semi-circular

Art.-No. 12 887

3 Bouquet, semi-circular

Art.-No. 12 889

4 Strawberry, „Willkommen“

Art.-No. 12 885

5 „Entrance“

Art.-No. 12 874

Coir Brush Mats

with PVC backing



Premium quality Coir Brush Mats with PVC-Backing

Strong maschine-tufted coir brush mats with PVC-backing. Reliable cleaning properties.

Dimensions: 60 x 40 cm

Thickness: 15 mm

1 Crown mat with metal shield

Art.-Nr. 14 834

2 Flower design

Art.-No. 14 832

3 Flower dream

Art.-No. 14 830

Packing: 10 pieces



Coir Brush Mat with Metal Plate for Engraving

Mat with additional removable, silver colour metal plate for individual engraving of family names, house names, initials or other symbols. Just detach nuts at the underside.

Caution: Stick a protective pad on top of the nuts at the underside to prevent delicate floors from scratches!




Coir Wire Brush Mats

 Coir fibre construction on a stainless steel frame for heavy-duty use.
 **Thickness:** 30 mm



Rectangular	
Dimensions	Art.-No.
60 x 40 cm	12 399
60 x 40 cm black	14 819
75 x 45 cm	12 396
80 x 50 cm	12 393

Semi circular	
Dimensions	Art.-No.
75 x 45 cm	12 392
70 x 40 cm	12 369

Packing: 10 pieces
Alternative sizes upon request.

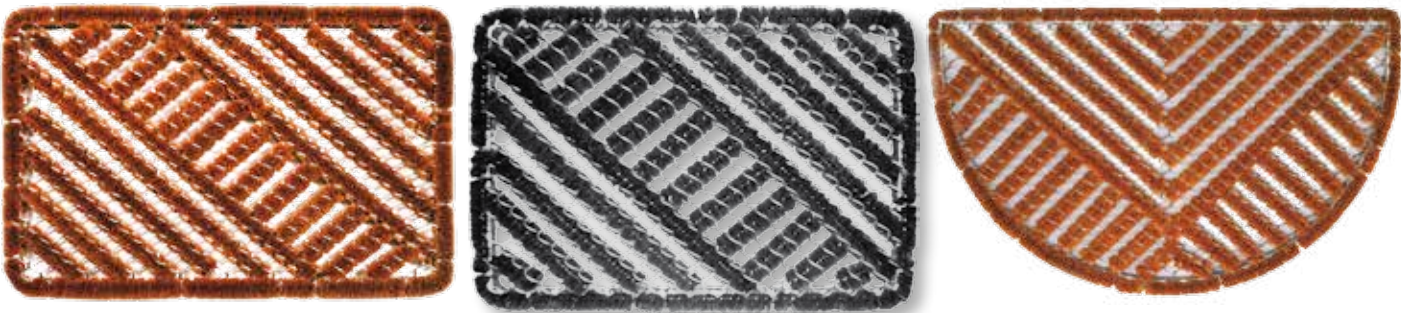

Coir Products

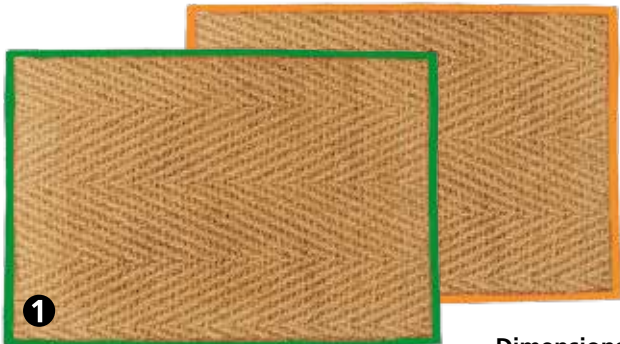

Dimensions 60 x 40 cm
1 With rubber-Design
with full latex backing
Border orange Art.-No. 12 363
Border green Art.-No. 12 364



Dimensions 55 x 32 cm
2 Edge and design in black colour
Art.-No. 12 362 with full latex backing



3 Boot Scraper
Cleans dirt from boots and shoes from below as well as from sides. Nylon bristles tufted on to a solid wooden base. Rubber strips on the underside hold the boot scraper in place

Dimensions:
Width: 36 x Length: 26.5 x Height: 5 cm
Art.-No. 12 394

Coir Wire Animal Boot Scrapers

 Attractive and robust boot scrapers in animal shape, made of coir fibre on a stainless steel frame construction.
 With flat rubber studs on the underside to avoid damage to the ground.




Duck
Size approx.: 30 x 24 x 20 cm
Art.-No. 12 931



Dog
Size approx.: 45 x 18 x 20 cm
Art.-No. 12 936



Turtle
Size approx.: 39 x 35 x 13 cm
Art.-No. 12 938



Pig
Size approx.: 40 x 20 x 18 cm
Art.-No. 12 935



Snail
Size approx.: 35 x 26 x 15 cm
Art.-No. 12 934


Coir Brush Rolls



Extra strong machine-tufted **coir brush rolls** with PVC-backing. Can be cut to required size or shape.

- will not fray
- strong liquid absorption
- superior cleaning quality
- heavy-duty for indoor and outdoor use

Length: 6 m
Surface: Coir
Underside: PVC
Weight/sqm: Approx. 8-9 kg depending on thickness

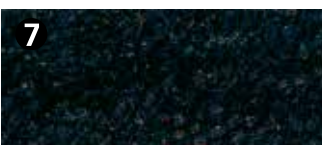

Natural Coir Brush Rolls:

1 Colour: Natural


Width	Thickness	Art.-No.	Price per sq. m.
200 cm	17 mm	12 390	
120 cm	17 mm	12 390 12 27	
80 cm	17 mm	12 390 22 27	
200 cm	24 mm	12 375	
120 cm	24 mm	12 370	
80 cm	24 mm	12 372	
200 cm	30 mm	12 365	

Coloured Coir Brush Rolls

Length: Max. 6 m
Width: 200 cm
Pile height: 17 mm

Available colours, upon request:

Colour	Art.-No
2 brown	12 387
3 grey	12 389
4 green	12 383
5 blue	12 384
6 red	12 388
7 black	12 385



Sports Flooring Tiles




Sports Flooring Tile
textilie polypropylen

Fire behaviour: BFL s1
Dimension: approx. 100 x 200 cm
Thickness: approx. 5,2 mm



orange



light grey



grey



black



red



green



dark blue

Mats STIFT®

Slip resistant, heavy duty rubber mats with sloped edges. Ideal for indoor, outdoor and industrial use. Hundreds of moulded studs ensure a thorough cleaning of dirt, mud, sand and wetness from footwear, reducing floor and carpet maintenance. Underside with slip-resistant ribs allow for drainage and prevent mat movement. The sloped edge on all 4 sides increases safety and prevents dirt and liquids from escaping on-to the floor.




① Suitable for all-purpose use: Indoors, outdoors and wet areas

Material: Natural rubber
Temperature range: -50°C up to +100°C

Dimensions	Colour	Art.-No.
55 x 35 cm/10 mm	brown	12 180
55 x 35 cm/10 mm	grey	12 170
78 x 54 cm/10 mm	grey	12 172
183 x 92 cm/14 mm	grey	12 175

Dimensions	Colour	Art.-No.
55 x 35 cm/10 mm	black	12 120
68 x 45 cm/10 mm	black	12 121
78 x 54 cm/10 mm	black	12 122
81 x 61 cm/12 mm	black	12 123
107 x 71 cm/12 mm	black	12 124
183 x 92 cm/12 mm	black	12 125

Stift Rolls		
1098 x 94 cm/12 mm	black	12 403

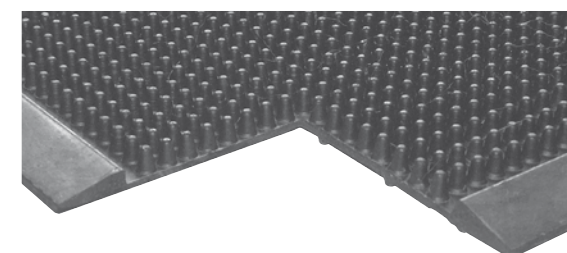


② „WELCOME“ Mat

Extremely economical rubber brush mat with a moulded message. Light weight for easy handling with a slip resistant underside. Two sizes available in colour black.

Dimension	Art.-No.
70 x 45 cm	12 179



OKTA®

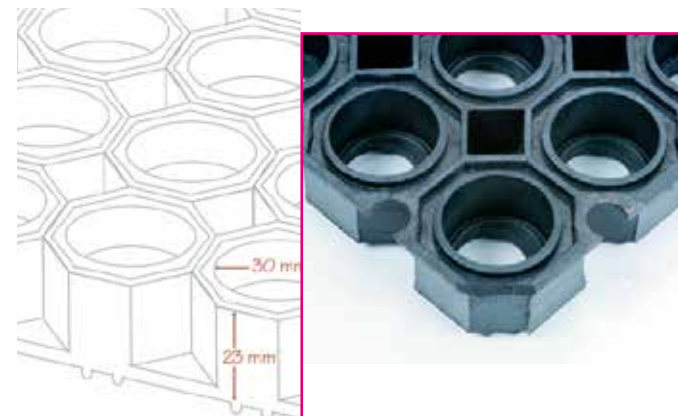

Robust, reliable rubber mats for all kinds of weather conditions. Slip resistant. With knobs on underside to enable excellent water drainage. Also ideal for working areas for universal use. With punched or unpunched base. Coloured mats available upon request.

Alternative mat sizes upon request. For large mat areas, mats can be joined together with mat connectors

OKTA

Material: Natural rubber
Temperature range: -50°C up to +100°C

Straight edges, 59 x 39 cm / 23 mm
Colour: black, **weight:** approx. 3 kg

Base	Art.-No.
punched base, not for Mat Connectors	12 101 001
punched base	12 101
unpunched base	12 104

Straight edges, 150 x 100 cm / 23 mm
Colour: black, **weight:** approx. 20 kg

Base	Art.-No.
punched base	12 105
unpunched base	12 106

Special sizes, with straight edge, punched base.
Colour: black

Size	Art.-No.
100 x 50 cm	12 250
80 x 60 cm	12 251
100 x 80 cm	12 252
120 x 80 cm	12 253

Additional sizes and colours available, upon request.

QUARTA®



QUARTA

Material: Natural rubber
Temperature range: -50°C up to +100°C

Straight edges, 59 x 39 cm / 23 mm
colour: black, **weight:** approx. 2.5 kg

Base	Art.-No.
punched base	12 102
unpunched base	12 103

Straight edges, 150 x 100 cm / 23 mm
colour: black, **weight:** approx. 18 kg

Base	Art.-No.
punched base	12 166
unpunched base	12 167


Weird edge, 150 x 100 cm / 23 mm
colour: black, **weight:** approx. 18 kg

Base	Art.-Nr.
punched base	12 168
unpunched base	12 169

Special sizes, without sloped edge, punched base. Colour: black

Size	Art.-No.
100 x 50 cm	12 271
80 x 60 cm	12 272
100 x 80 cm	12 274
120 x 80 cm	12 273

Additional sizes and colours available, upon request.

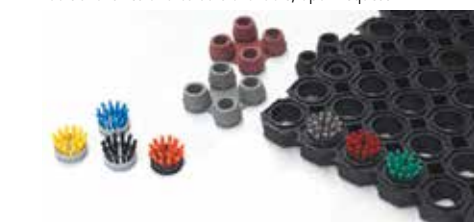

② Mat Connectors


for Okta® and Quarta® mats are made of durable rubber to provide a secure connection between several mats. Packing: Loose

② Mat Connector

Colour	Art.-No.
black	12 190



Okta

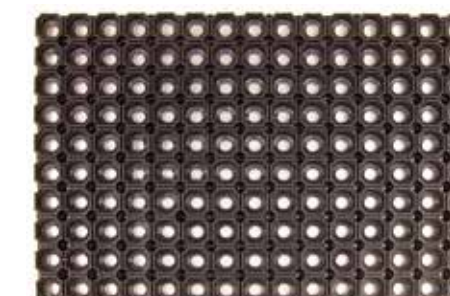

Quarta

① Brush Inserts

Are for Okta® and Quarta® rubber mats to provide better cleaning effect. Plastic base available in colours black or grey.

Bristle material: Nylon
Height: 20 mm

Packing: 10 pieces/polybag or 500 pieces/polybag



① Black base

Colour	Art.-No.
orange	12 189
yellow	12 194
grey	12 195
black	12 196
blue	12 197
green	12 198
red	12 199





Rubber stair protectors are suitable for indoor and outdoor staircases to reduce the danger of slipping and provide noise insulation. Surfaces are available with ribs or studs.

Material: Natural rubber
Tread dimensions: 75 x 25 cm
Edge height: 29 mm
Thickness: 4 mm

Ribs	Studs	
Colour	Art.-No.	Art.-No.
1 brown	12 142	12 143
2 grey	12 144	12 145
3 black	12 140	12 141

Packing: 20 pieces

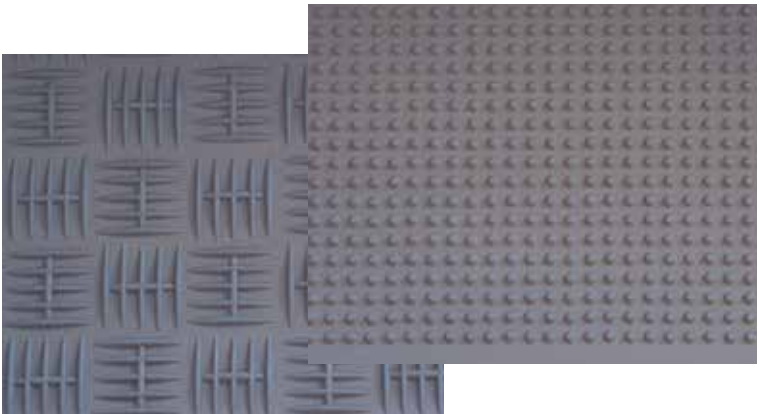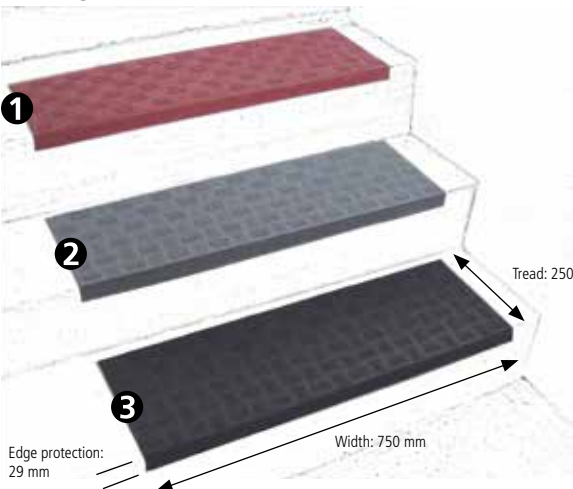

Smooth underside is suitable for use with adhesive. If required, staircase mats can be supplied with adhesive tape on the underside.

Full-surface bonding
Art.-No. 12 990
40 mm wide bonding
Art.-No. 12 991
38 mm all-weather bond
Art.-No. 12 992





Rubber mats with heat sublimation printed motives on non-woven fibre.
Extra comfortable to stand on due to soft foam. Easy cleaning by sweeping, vacuum or soap water with soft bristle brush. UV resistant. Mainly for indoor use.

Thickness: 4-5 mm
Surface: Polyester non-woven fibre
Base: Rubber

Dimensions 60 x 40 cm	Art.-No.
1 Sunflower	14 710
2 Maple Leaf	14 711
3 Pebble Stones	14 712
4 Iron Sheet	14 713

Dimensions: 75 x 45 cm	Art.-No.
5 Tomatoes	14 714
6 Fruit	14 715
7 Zebra	14 716
8 Giraffe	14 717
9 Kitten	14 718
10 Flagstone	14 719

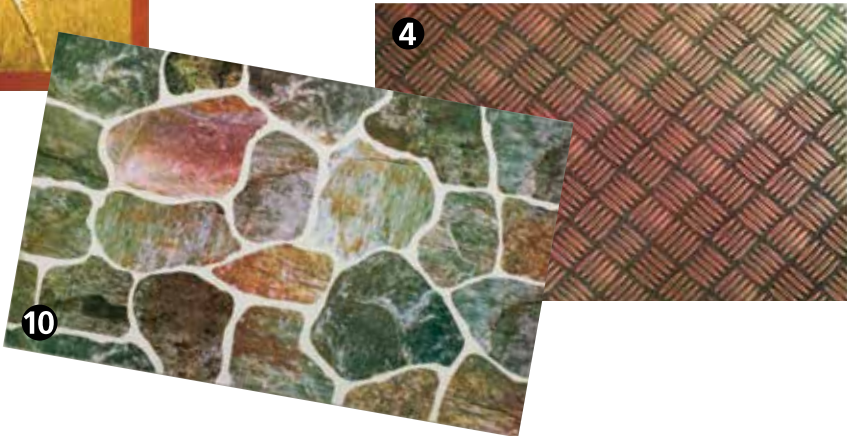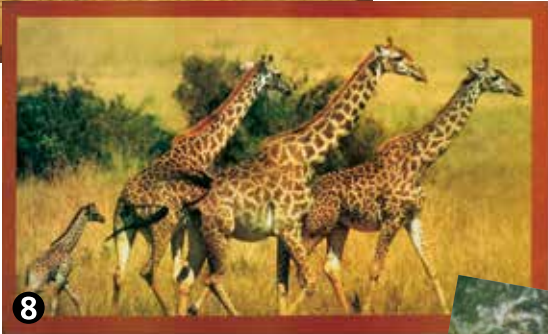





Cleaning Mats



LEOPARD

The Professional
Thickness: Approx. 8 mm
(3 mm base, 5 mm tufting material)
Border: 30 mm
Surface: Polypropylene
Backing: PVC anti-slip base, UV-resistant

Extremely effective heavy duty mat for commercial use in areas of heavy foot traffic: Offices, shops, entrance halls, public buildings etc.

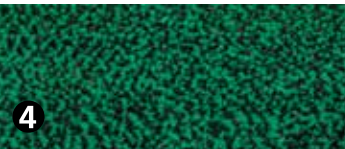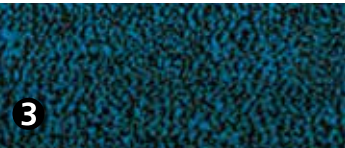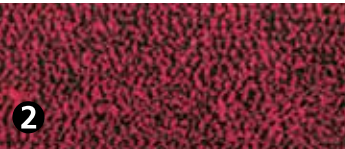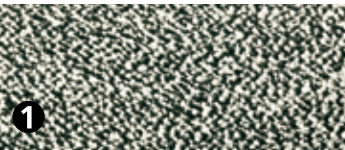

Mats
150 x 90 cm

Colour	Art.-No.
1 black/white	13 970
2 bordeaux/black	13 971
3 blue/black	13 972
4 green/black	14 990

180 x 120 cm

Colour	Art.-No.
1 black/white	13 987
2 bordeaux/black	13 988
3 blue/black	13 989
4 green/black	14 991

All colours are mottled.

Rolls
90 cm x 25 m

Colour	Art.-No.
1 black/white	13 975
2 bordeaux/black	13 976
3 blue/black	13 977

120 cm x 25 m

Colour	Art.-No.
1 black/white	13 980
2 bordeaux/black	13 981
3 blue/black	13 982
4 green/black	14 993

200 cm x 25 m

Colour	Art.-No.
1 black/white	13 984
2 bordeaux/black	13 985
3 blue/black	13 986



Cleaning Mats



PUMA



Water Absorber
Thickness: Approx. 9 mm
(2 mm base, 7 mm tufting material)
Border: 30 mm
Surface: Polyamide
Backing: PVC anti-slip base, UV-resistant

Ideal for areas with heavy traffic. Machine washable at 30°C. Optimum cleaning and moisture absorbant effect. Bright colour polyamide surface with anti-slip heavy duty PVC base. UV-resistant.

Approx. 3 cm wide border line is ideal for heavy duty use and resistant to temperature changes.
Tufting material: Contains approx. 750 g/sqm.

discontinued colours, while stock last!

	60 x 40 cm	90 x 60 cm	120 x 90 cm	150 x 90 cm	180 x 60 cm	180 x 120 cm
Colour	Art.-No.	Art.-No.	Art.-No.	Art.-No.	Art.-No.	Art.-No.
1 blue	13 902	13 912	13 907	13 922	13 932	13 928
2 grey	13 900	13 910	13 908	13 920	13 930	13 929
3 bordeaux	13 904	13 914	13 909	13 924	13 934	13 937
4 light blue		13 911	13 917	13 921	13 931	13 938
5 green	13 903	13 913	13 918	13 923	13 933	13 939
6 brown		13 919	13 919	13 925	13 935	13 946
7 black	13 906	13 916	13 927	13 926	13 936	13 948
8 orange	13 941	13 943				

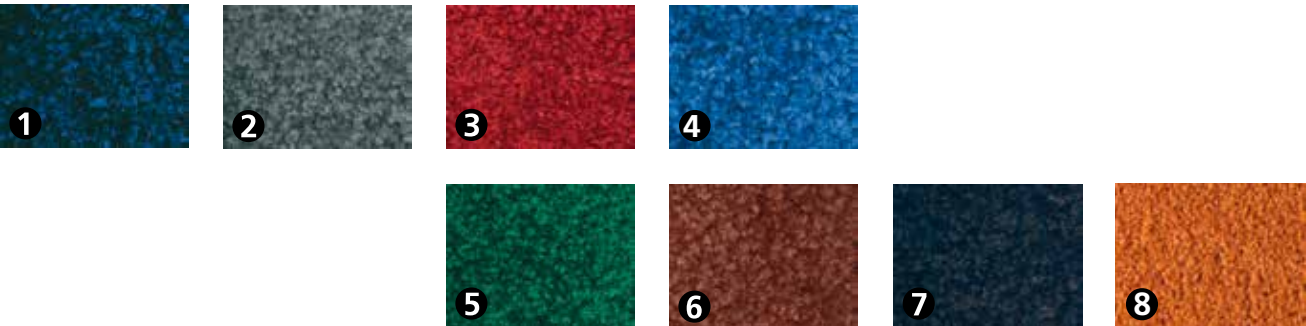

TIGER-Dirt Arrester



Indoor entrance mat for heavy traffic. For commercial as well as domestic use. Stripe design polypropylene surface removes all dirt. Durable tufting material (approx. 700g/sqm) with UV-resistant PVC anti-slip backing. Approx. 3 cm wide boarder line resistant to heavy duty use and change of temperatures.

Thickness: Approx. 8 mm (3 mm base, 5 mm tufting material)
Border: 30 mm
Surface: Polypropylene
Backing: PVC anti-slip base, UV-resistant

Mats
60 x 40 cm

Colour	Art.-No.
1 blue	13 947
2 grey	13 945
3 bordeaux	13 949

90 x 60 cm

Colour	Art.-No.
1 blue	13 942
2 grey	13 940
3 bordeaux	13 944

150 x 90 cm

Colour	Art.-No.
1 blue	13 952
2 grey	13 950
3 bordeaux	13 954



Rolls

90 cm x 25 m

Colour	Art.-No.
1 blue	13 962
2 grey	13 960
3 bordeaux	13 964

120 cm x 25 m

Colour	Art.-No.
1 blue	13 967
2 grey	13 965
3 bordeaux	13 969

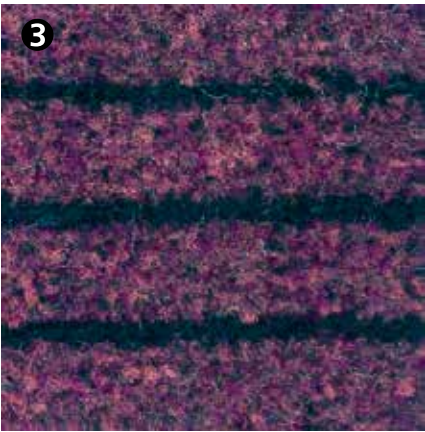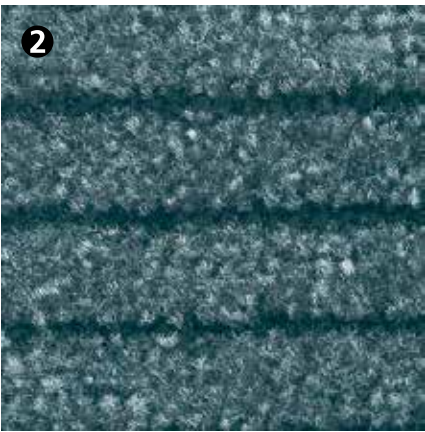

DRAGON-Professional Cleaning Mat

Professional entrance mat, heavy contract quality for heavily frequented entrances. When correctly installed, 90% of all dirt is retained. Mat withholds up to 7 l water/sqm. Large areas can be glued down like a carpet if required. Daily cleaning with a powerful vacuum cleaner. Periodical cleaning with spray extraction.

Tested fire retardant: B_{fl} s-1

Thickness: Approx. 10 mm (3 mm backing, 7 mm pile height)
Surface: Polyamide
Backing: Special vinyl

Mats

90 x 60 cm

Colour	Art.-No.
1 dark grey	14 900
2 terracotta	14 901
3 blue	14 902

90 x 150 cm

Colour	Art.-No.
1 dark grey	14 920
2 terracotta	14 921
3 blue	14 922





Rolls

120 cm x 25 m

Colour	Art.-No.
1 dark grey	14 930
2 terracotta	14 931
3 blue	14 932

205 cm x 25 m

Colour	Art.-No.
1 dark grey	14 940
2 terracotta	14 941
3 blue	14 942

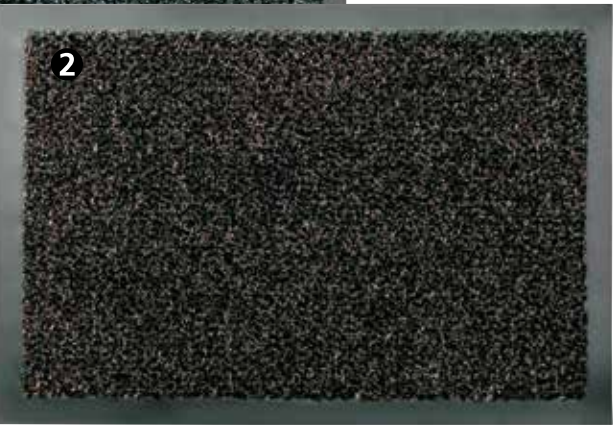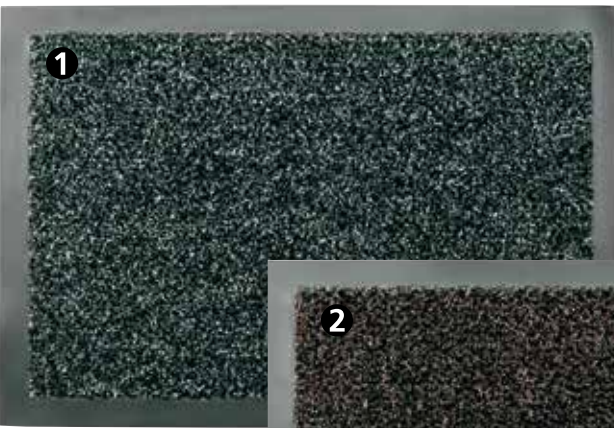


Cleaning Mat LION



Super Clean
Needle punched mats to clean small and large dirt particles. Additional spacious grooves to collect dirt particles.

Thickness: Approx. 8 mm
(1,5 mm base, 6.5 mm pile height)
Surface: Polypropylene
Backing: PVC

Mats	
90 x 60 cm	
Colour	Art.-No.
4 blue	14 950
150 x 90 cm	
Colour	Art.-No.
2 red	14 962
4 blue	14 960

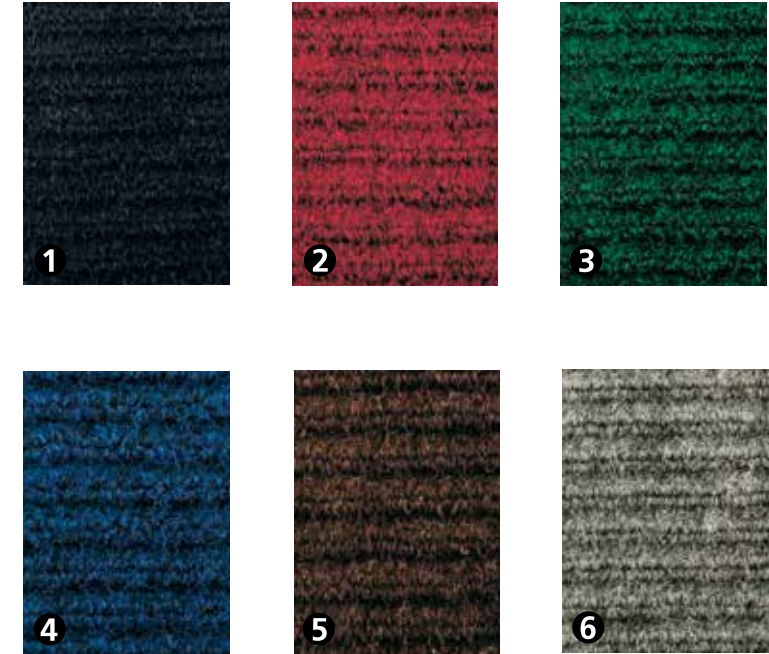

Rolls	
90 cm x 25 m	
Colour	Art.-No.
2 red	14 972
4 blue	14 970


120 cm x 25 m	
Colour	Art.-No.
3 green	14 984
5 brown	14 985
6 grey	14 981




1 PRIMA® Rubber Wave Mat



2 PRIMA® ALU Aluminium Cleaning Zone

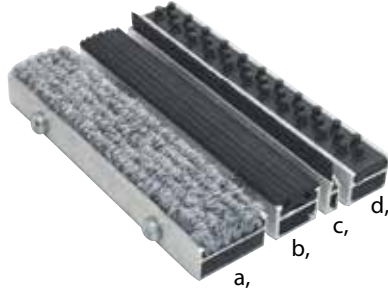

3 Brush Dirt Barrier

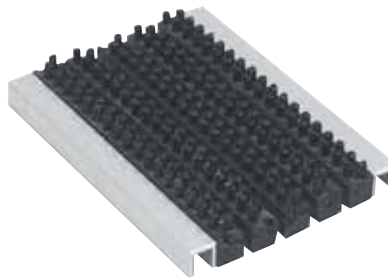

1 Rubber Wave Mats

Rubber stripes are formed into wave form and constructed onto an aluminium frame. Stable and durable construction, ideal for heavy duty use: i.e. in entrances of hotels, shops, banks, hospitals, public buildings, schools, large residential areas, museums, etc.

The rubber stripes sweep dirt from the shoe underside when walking on the mat. Roll up for cleaning, mat should be flipped from time to time to ensure wear and tear on both sides. Materials will not rust, rot or decay.

For an optimum barrier against dirt, after the rubber wave mat, which will remove larger dirt particles, a LEOPARD polypropylene mat (see on page 22) should be layed to clean the final dirt particles.

PRIMA® Rubber Wave Mat
Thickness: 27 mm
Art.-No. 12 670




2 Aluminium Cleaning Zone Mat

For professional entrance design and complete dirt barriers:

- a. Heavy duty textile top for absorbion of dirt and water.
Available colours: ocker, green
Mottled colours: grey, blue, blue-green, brown, red, black, dark brown, dark blue
- b. Rubber grid for removal of dirt and dust.
- c. Long brushes to remove fine dust and dirt particles.
- d. Rubber knobs to remove dirt residues.

PRIMA® Aluminium Cleaning Zone Mat
Thickness: 27 mm
Art.-No. 12 681

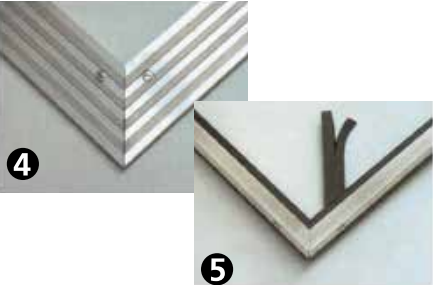

Technical Information:
PRIMA® Rubber Wave Mat, Aluminium Cleaning Zone and the Brush Dirt Barrier mats have to be installed on top of hard surface. Suitable inlay frame made from aluminium can be supplied made to order.

3 Brush Dirt Barrier

Effective and strong polyethylene bristles are tufted on a PP-strip. Will clean dirt effectively when walking over the brushes. PP strips are held together by a plated steel wire. Side strips are made from rust free aluminium. Mat can be rolled up to clean the underside dirt.

PRIMA® Brush Dirt Barrier
Thickness: 23 mm
Art.-No. 12 682

4 Aluminium Frame with Sloped Edge	
Width	Art.-No.
45 mm	12 679
65 mm	12 680

5 Aluminium Inlay Frame for Installation Under Ground Level	
Dimensions	Art.-No.
20 x 30 x 3 mm	12 671
30 x 30 x 3 mm	12 672



Boot Trays

Made of strong plastic with a ribbed surface designed to trap excess dirt and wetness from footwear. A safe and practical way to protect any floor surface.

68 x 43 cm
with wavy ribs
Edge height: 20 mm

Colour	Art.-No.
2 green	12 597
3 grey	12 596

Packing: 12 pieces

61 x 36 cm
with straight ribs
Edge height: 15 mm

Colour	Art.-No.
4 green	12 592

Packing: 30 pieces



NUDEL-Mat



Durable and comfortable floor mat:

- retain wetness and dirt
- protect the floor surface
- help to alleviate back strain
- for indoor and outdoor use
- very durable
- extra soft vinyl material
- open base for better drainage
- oil resistant

Material: Vinyl

Scope: Cleaning mat, place of work, leisure facilities etc.

Thickness: 12 mm
Base: Closed, with bevelled edges

Dimensions: 60 x 90 cm
Weight: Approx. 2.1 kg

Colour	Art.-No.
1 grey	12 784
3 blue	12 785

Dimensions: 150 x 90 cm
Weight: Approx. 5.4 kg

Colour	Art.-No.
1 grey	12 786
3 blue	12 787




Thickness: 14 mm
Base: Open, straight edges
Dimensions: 122 cm x 12.2 m

Colour	Art.-No.
1 grey	12 780
2 black	12 781
3 blue	12 782
4 green	12 783

Easy Cleaning:

- dirt shakes out easily
- clean with vacuum
- spray with water
- scrub with broom

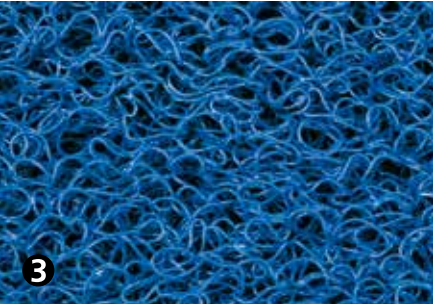

Wave Mats








Vinyl Rolls, extremely flexible, ideal for industry, behind the counter, swimming pools, wash rooms, locker rooms. Available in different thickness and colours.

Material: Vinyl
Dimensions: 120 cm x 15 m


Thickness: 5 mm	Weight: 4 kg/sqm
Colour	Art.-No.
1 green	12 216
2 blue	12 217
3 grey	12 218

Thickness: 8 mm	Weight: 6 kg/sqm
Colour	Art.-No.
4 green	12 416
5 blue	12 417
6 grey	12 418

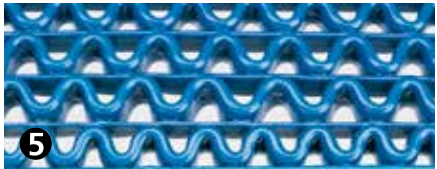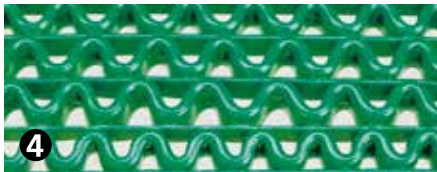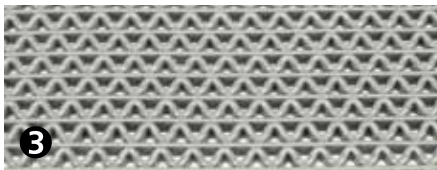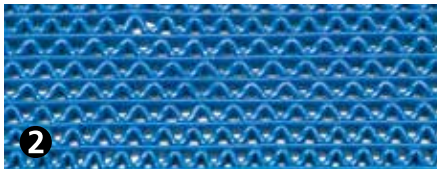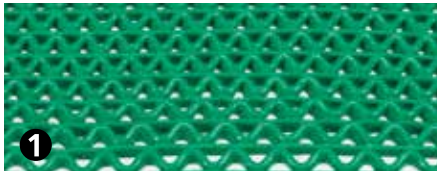

Rubber Stud Flooring
Medium Round Stud

KN

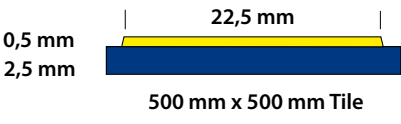


Premium quality rubber tile flooring for heavy traffic.
Underside: Smooth, sanded **Material:** Rubber, flame retardant **Fire behaviour:** B_{fl}-s1

light grey (RAL 7035)	pebble grey (RAL 7032)	silver grey (RAL 7001)	traffic grey (RAL 7042)	basalt grey (RAL 7012)
oyster white (RAL 1013)	green beige (RAL 1000)	sand yellow (RAL 1002)	ivory (RAL 1014)	beige (RAL 1001)
beige red (RAL 3012)	salmon red (RAL 3022)	copper brown (RAL 8004)	oxide red (RAL 3009)	beige brown (RAL 8024)
pastel turquoise (RAL 6034)	pastel blue (RAL 5024)	dove blue (RAL 5014)	sky blue (RAL 5015)	cobalt blue (RAL 5013)
antique red (RAL 3014)	flame red (RAL 3000)	pale green (RAL 6021)	may green (RAL 6017)	turquoise green (RAL 6016)
ocean blue (RAL 5020)	blue lilac (RAL 4005)	pastel violet (RAL 4009)	purple violet (RAL 5000)	signal black (RAL 9004)

RAL colours mentioned are only intended for information purposes. Colour swatches or original colour swatch book are available upon request.



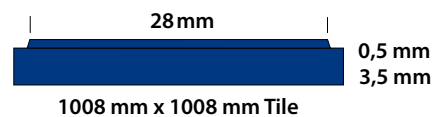


GN Rubber Stud Flooring

Smooth Large Round Stud


Premium quality rubber tile flooring for heavy traffic.

Underside: Smooth, sanded **Material:** Rubber, flame retardant **Fire behaviour:** B_{fl}-s1

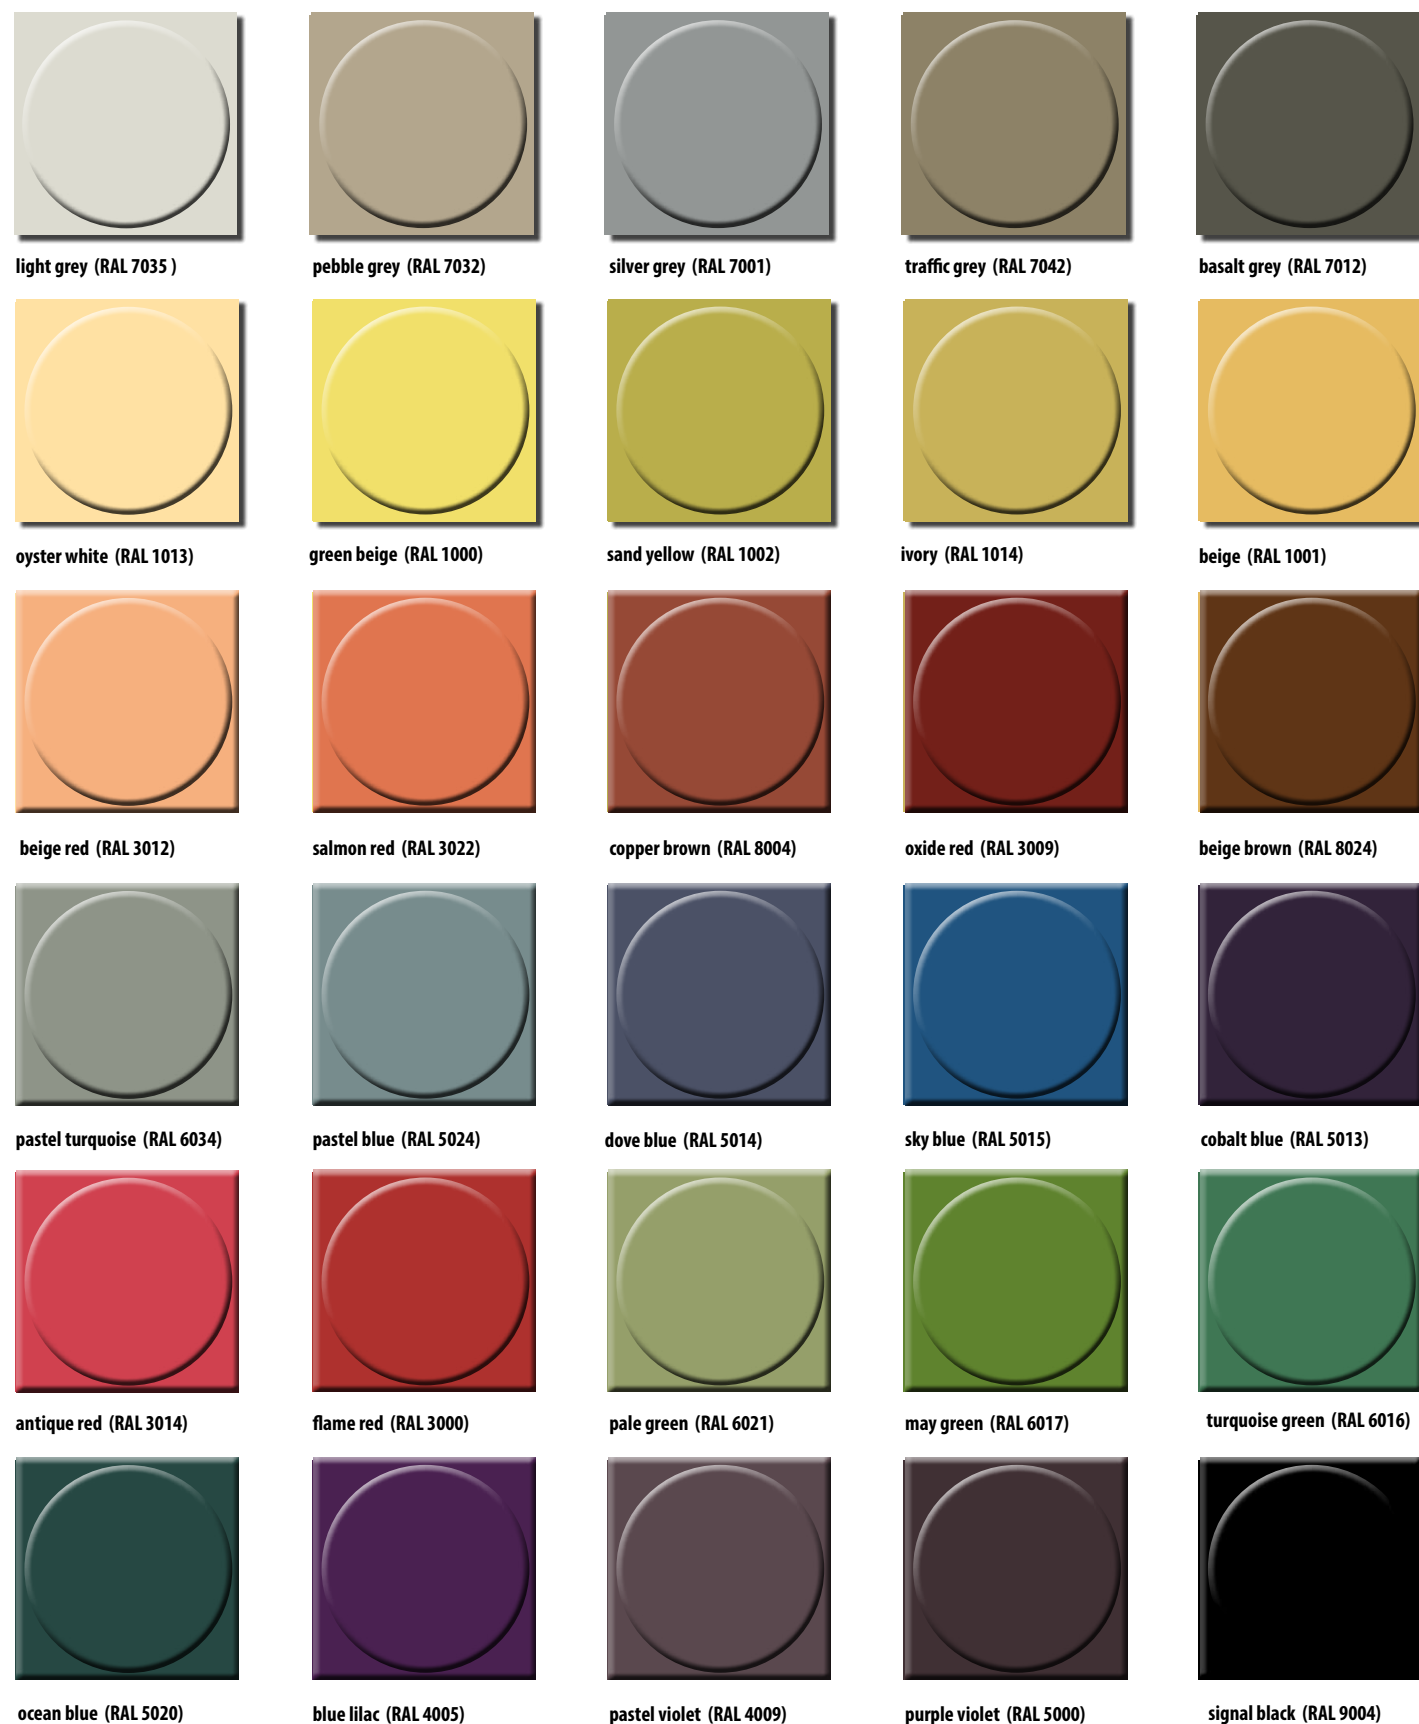



RAL colours mentioned are only intended for information purposes. Colour swatches or original colour swatch book are available upon request.

SGN Combination Stairtread, Nosing & Riser

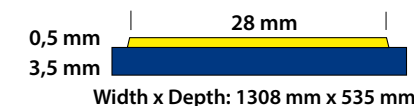

Premium quality rubber stair tread for heavy traffic.

Underside: Smooth, sanded **Material:** Rubber, flame retardant **Fire behaviour:** B_{fl}-s1

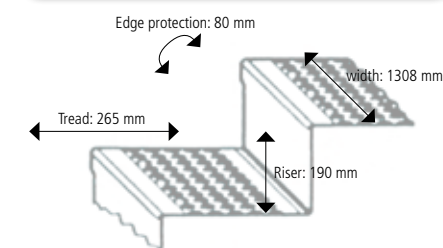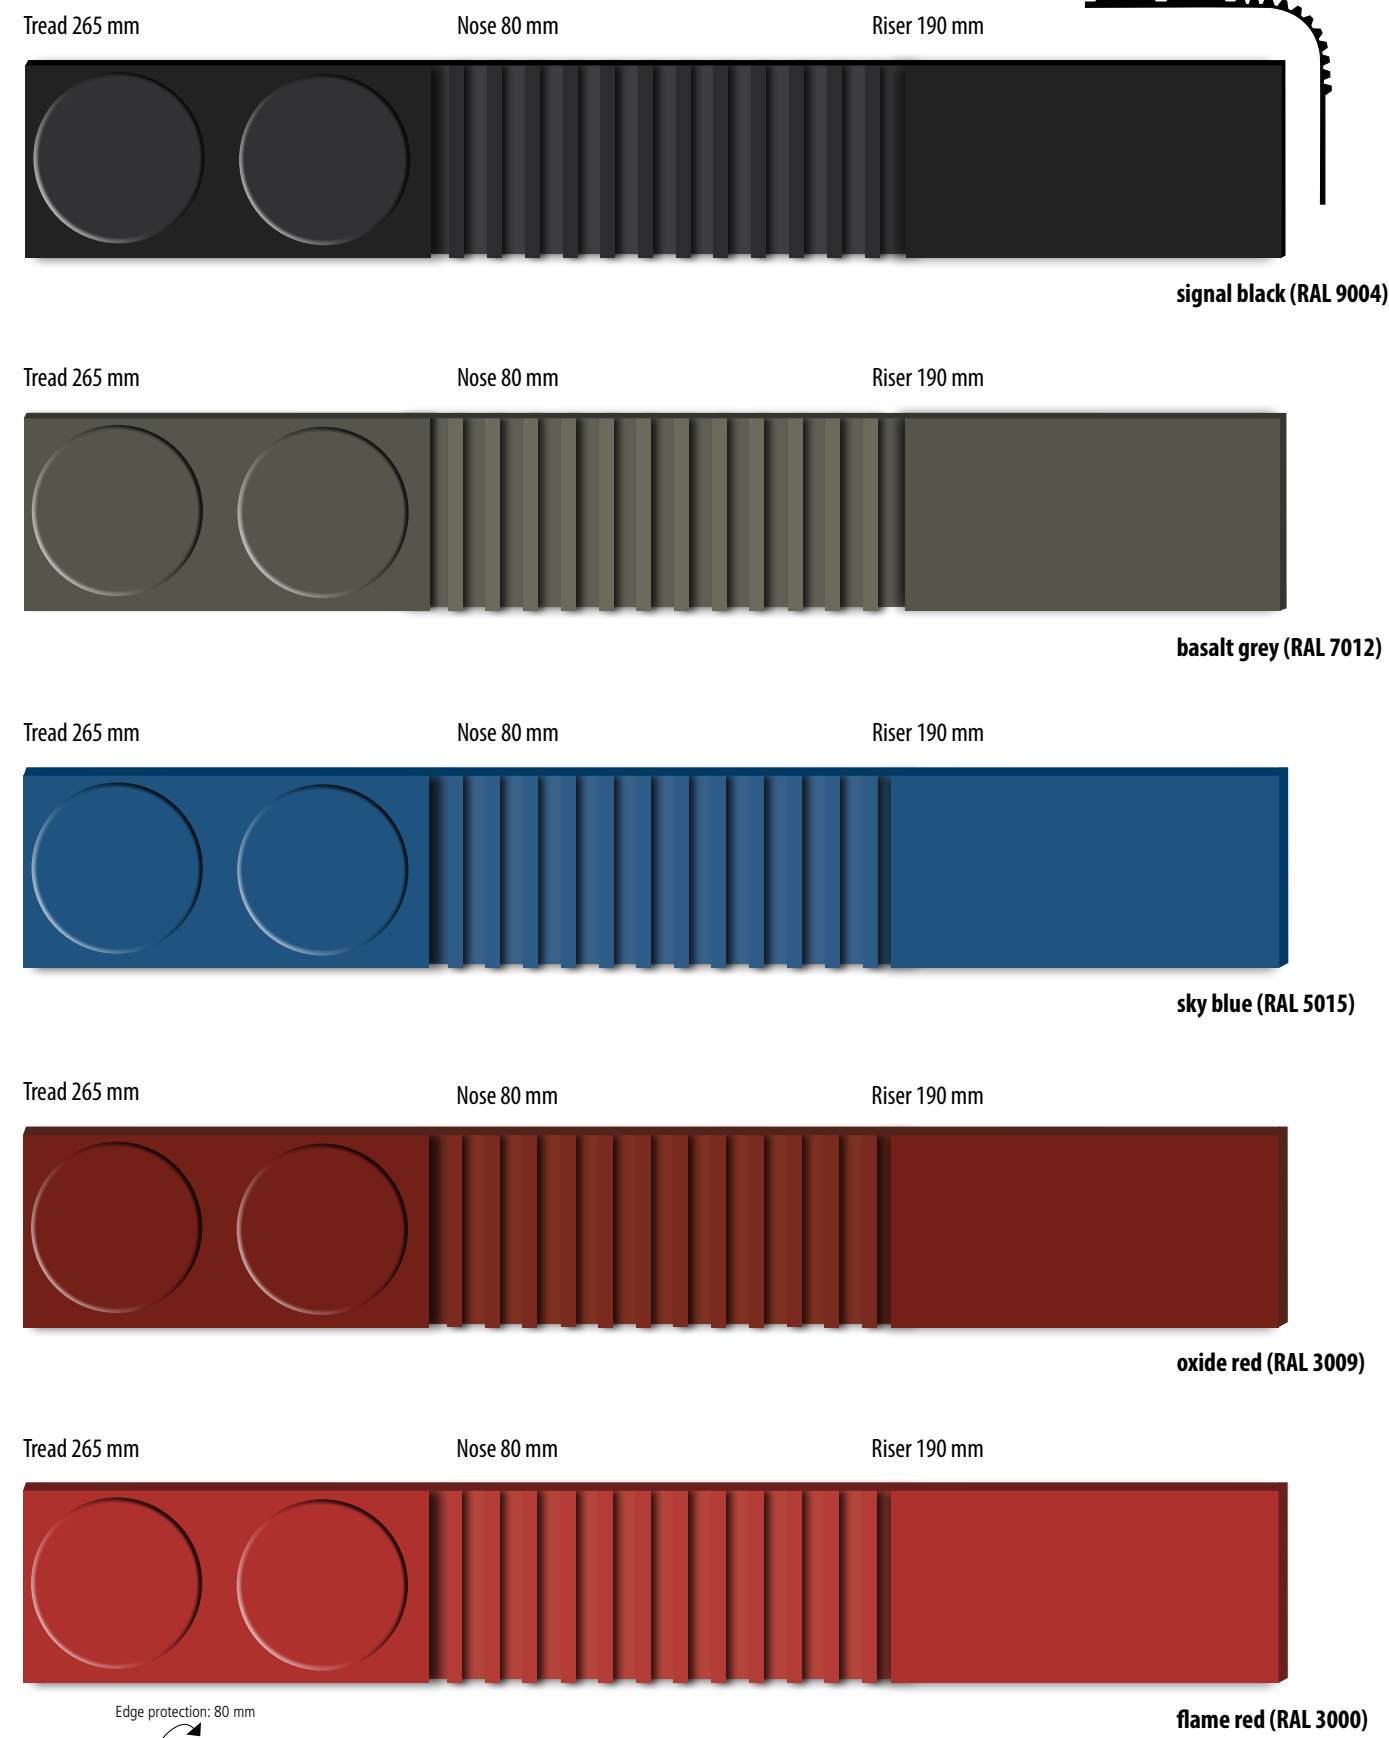


RAL colours mentioned are only intended for information purposes. Colour swatches or original colour swatch book are available upon request. Preformed rubber stair tread is available in all 30 colours as KN rubber stud flooring. Pictures and more information page 18.




GU Rubber Flooring Smooth Surface

Monocolour, smooth surface rubber flooring, ideal for heavy traffic areas. Excellent slip resistance. Optimum wheeling capability.
Underside: Smooth, sanded **Material:** Rubber, flame retardant **Fire behaviour:** B_f-s1


Rubber Flooring Smooth Surface with Chips

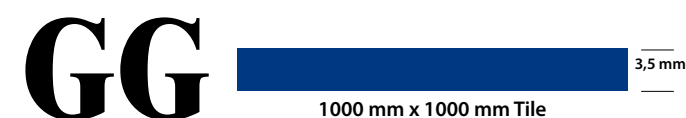

Smooth surface and distinct terrazzo effect. Ideal for very heavy traffic areas. Optimum wheeling capability.
Underside: Smooth, sanded **Material:** Rubber, flame retardant **Fire behaviour:** B_f-s1

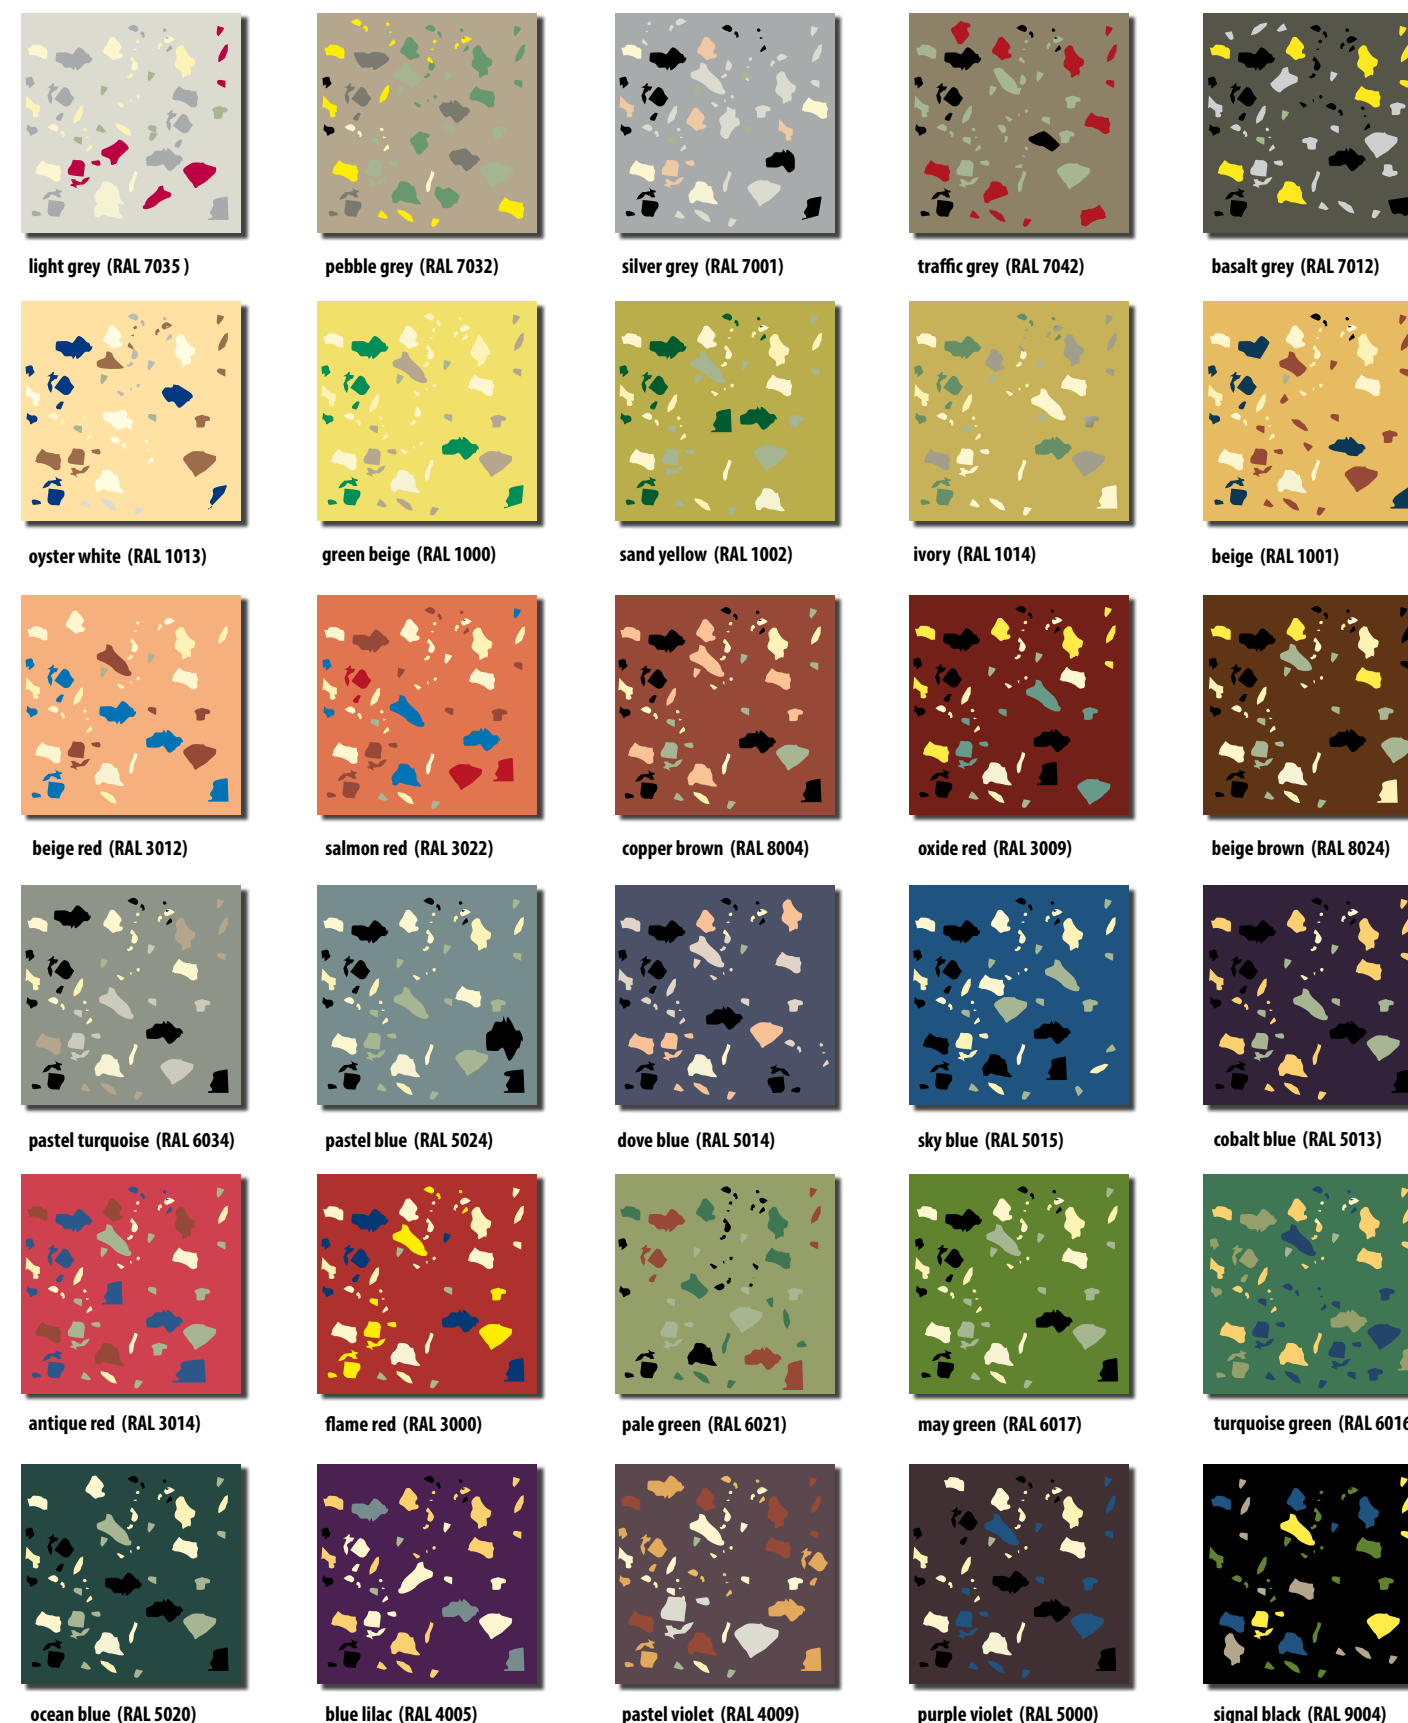

RAL colours mentioned are only intended for information purposes. Colour swatches or original colour swatch book are available upon request.



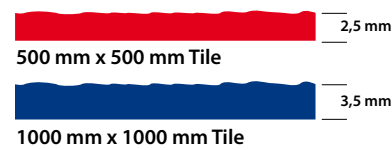


Rubber Flooring Hammerblow Surface HU


Uni colour hammerblow surface, reflection-free. Excellent sound absorption, low abrasion values.
Underside: Smooth, sanded **Material:** Rubber, flame retardant **Fire behaviour:** B_f-s1

Rubber Flooring Hammerblow Surface, with Chips HG

Elastic rubber floor covering with hammerblow surface and non-geometric granule design. Excellent sound absorption, low abrasion values.
Underside: Smooth, sanded **Material:** Rubber, flame retardant **Fire behaviour:** B_f-s1

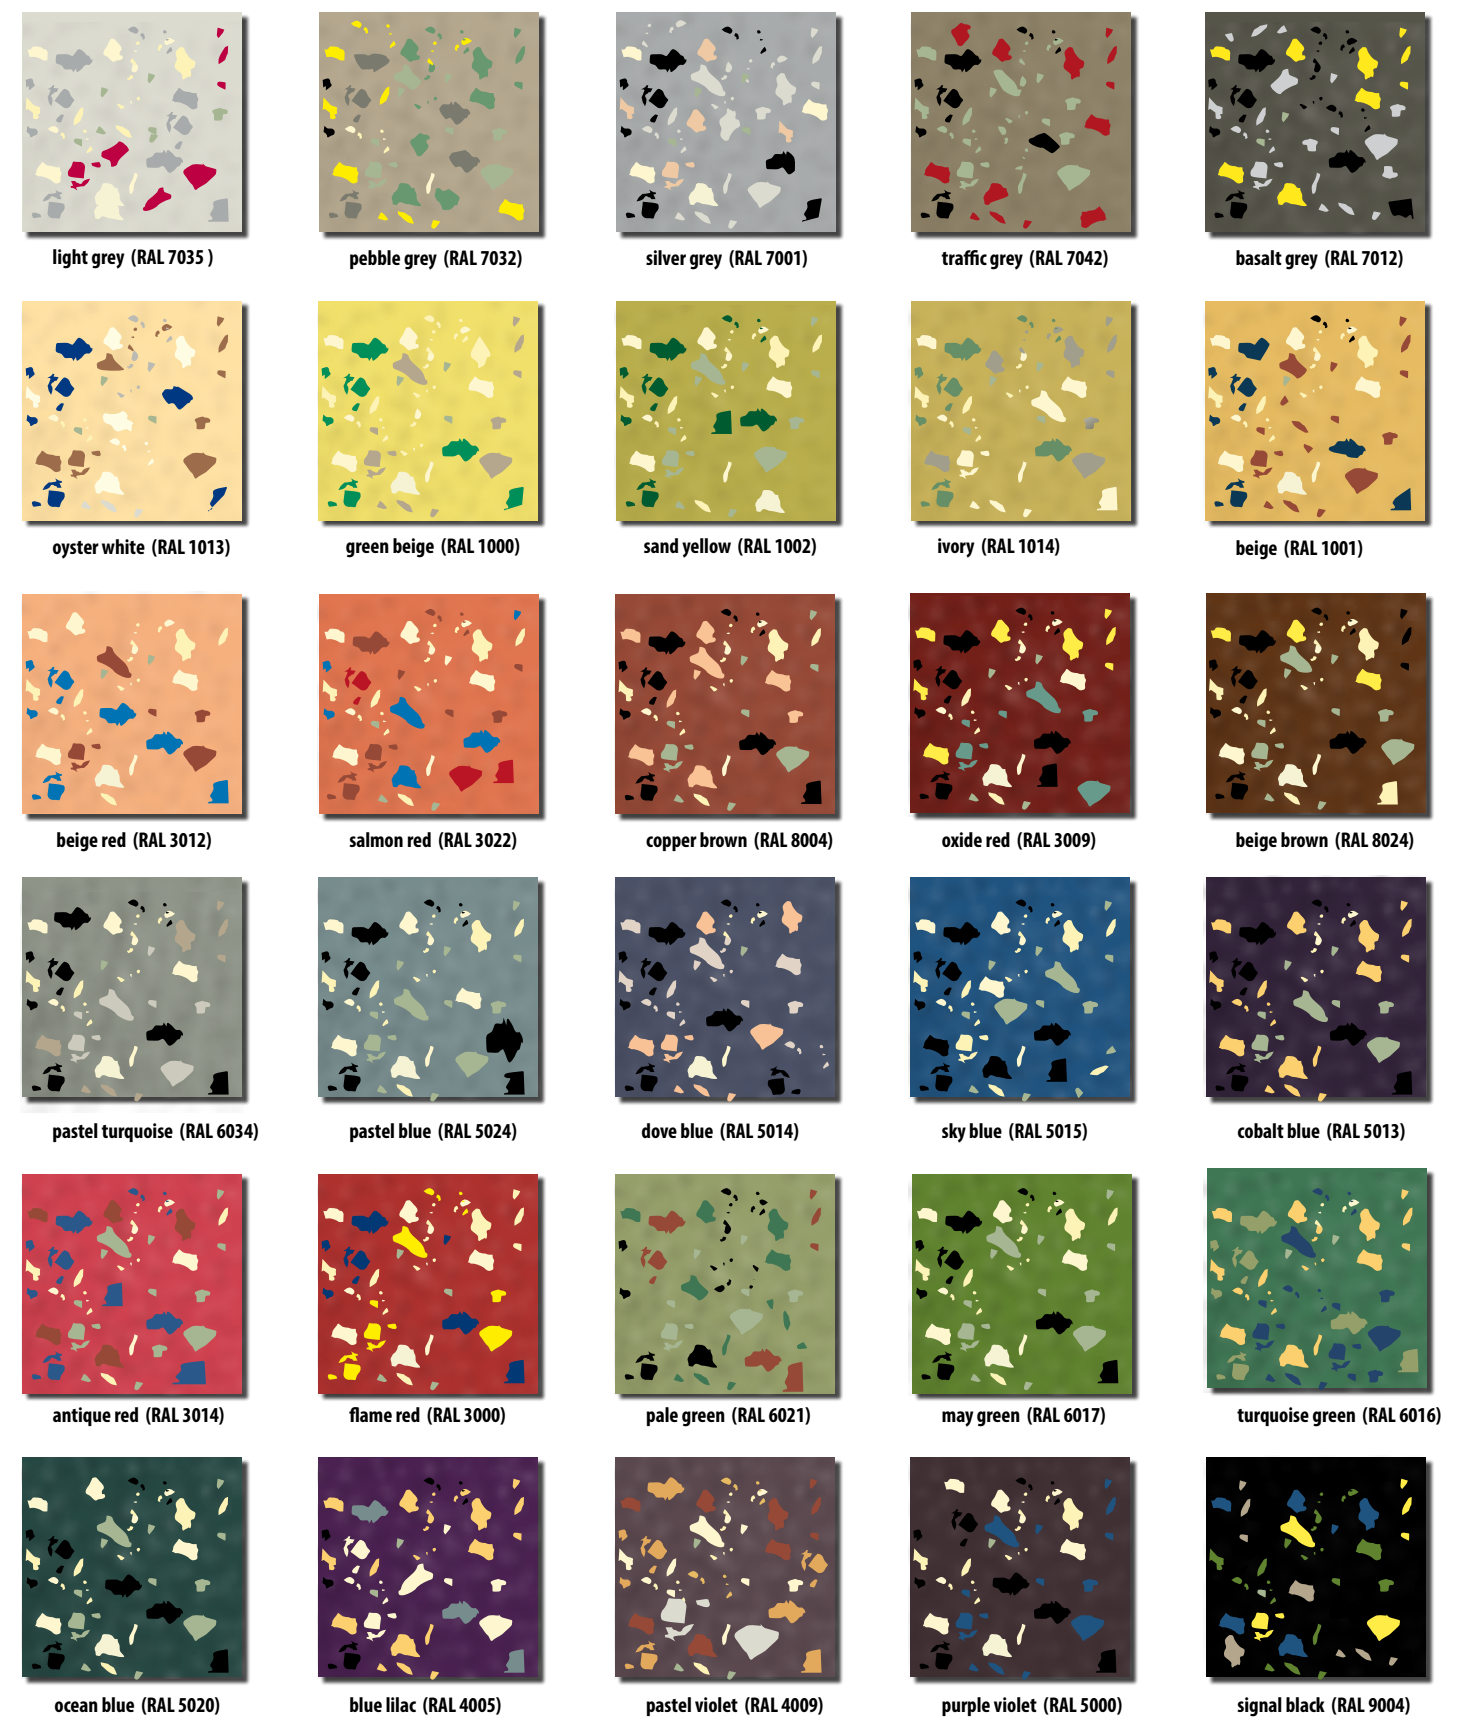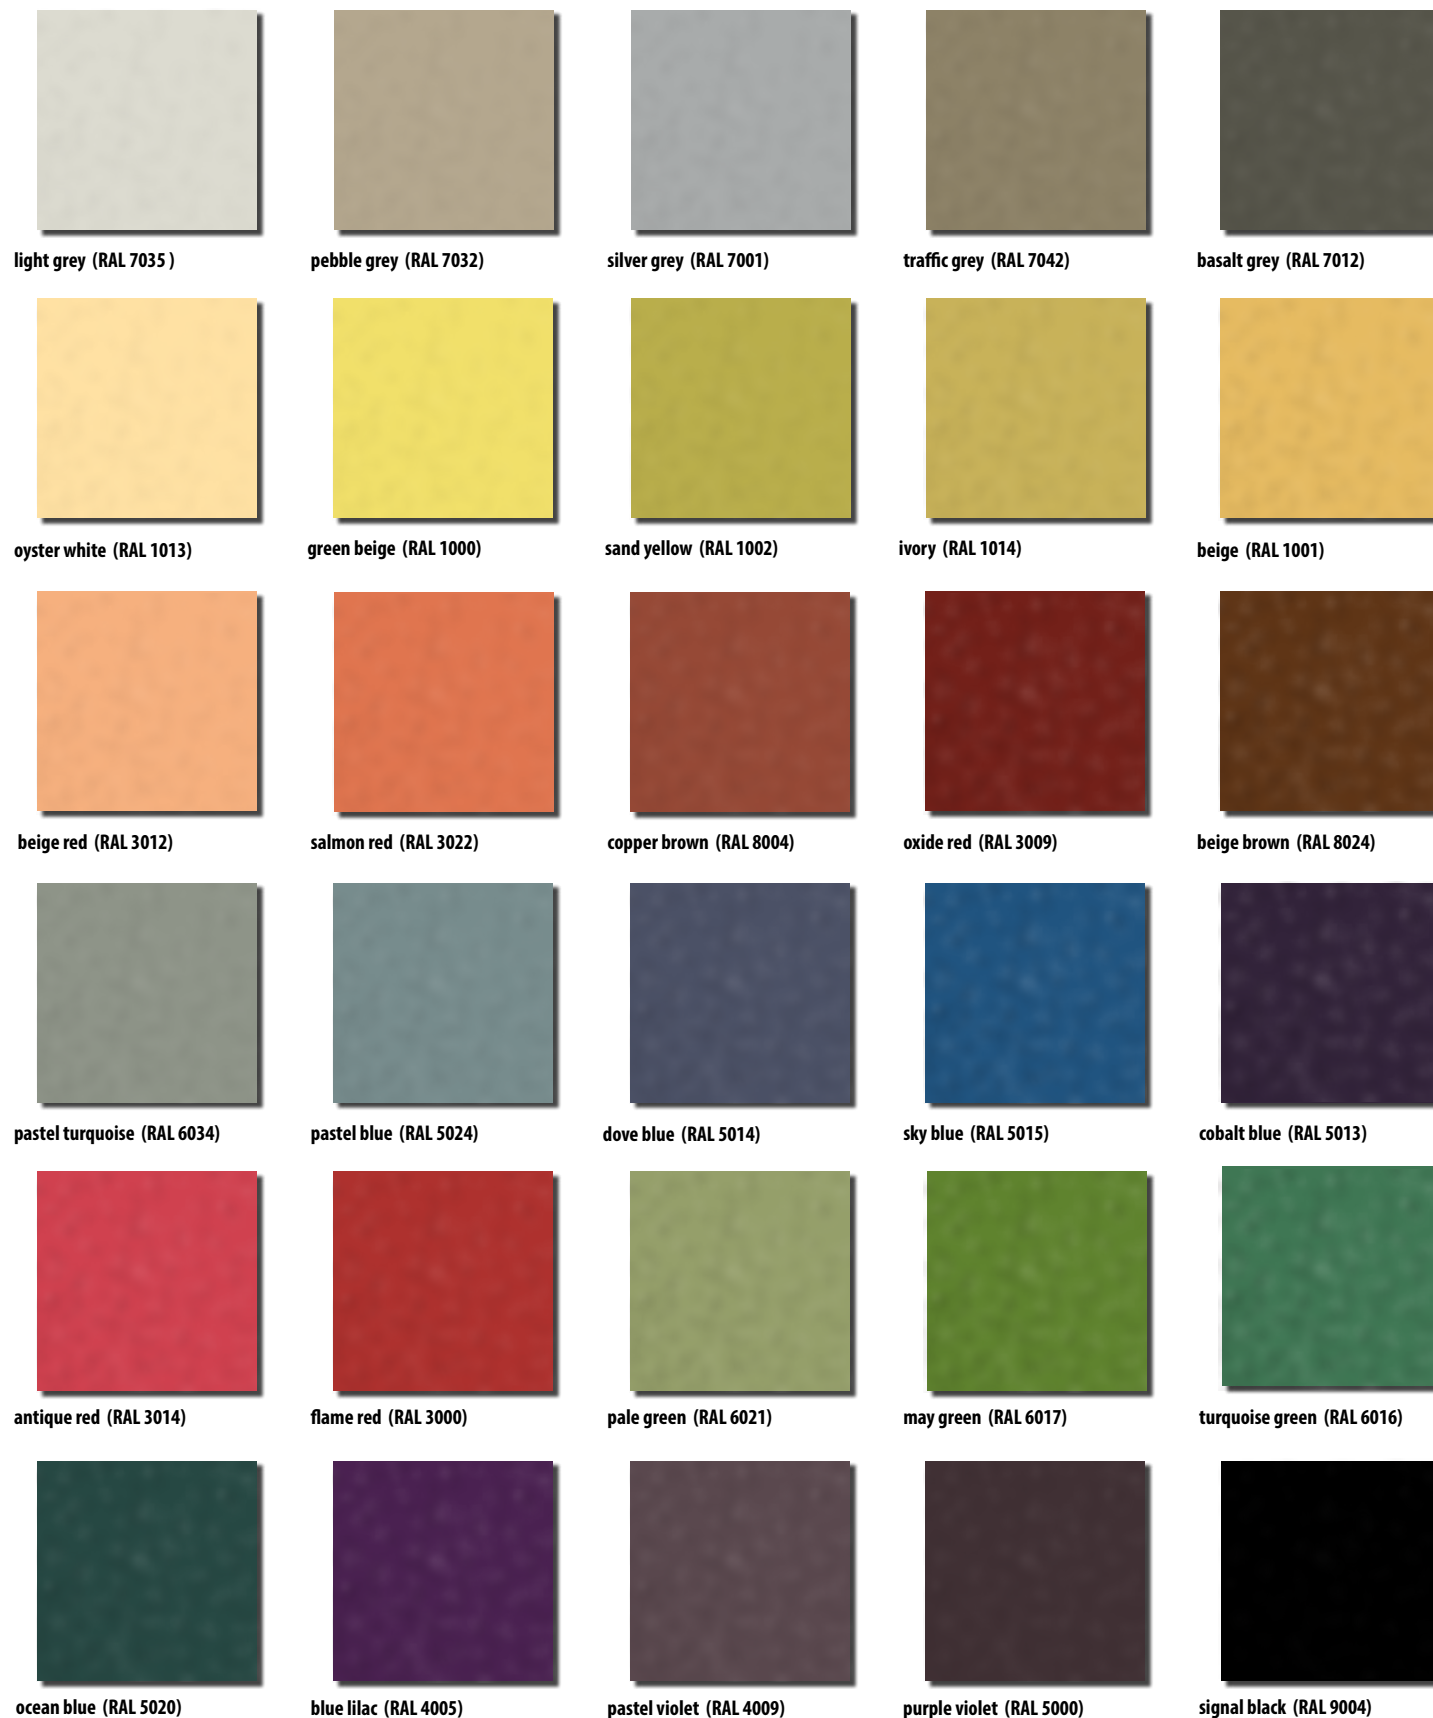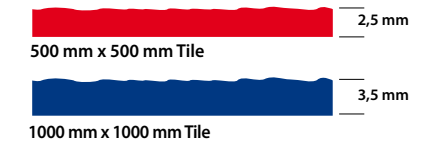

RAL colours mentioned are only intended for information purposes. Colour swatches or original colour swatch book are available upon request.




MN Rubber Flooring Small Round Studs

Premium quality rubber tile flooring for medium to heavy traffic. Low stud height. Easy to clean.
Underside: Smooth, sanded **Material:** Rubber, flame retardant **Fire behaviour:** B_{fl}-s1



RAL colours mentioned are only intended for information purposes. Colour swatches or original colour swatch book are available upon request.

Rubber Flooring Square Studs QN




Premium quality rubber tile flooring for heavy traffic.
Underside: Smooth, sanded **Material:** Rubber, flame retardant **Fire behaviour:** B_{fl}-s1



RAL colours mentioned are only intended for information purposes. Colour swatches or original colour swatch book are available upon request.

Orange Peel Surface Flooring


SBP Sport puzzledesign



with puzzle edge


Sports & Recreational Flooring

SB 6



underside smooth, sanded

SB 12



underside with knobs



Ice Skating Rink Flooring

Hammerblow Surface

Uni colour hammerblow surface, reflection-free. Excellent sound absorption, low abrasion values.

Underside: Smooth, sanded **Material:** Rubber, flame retardant **Fire behaviour:** B_{f1}-s1

SR

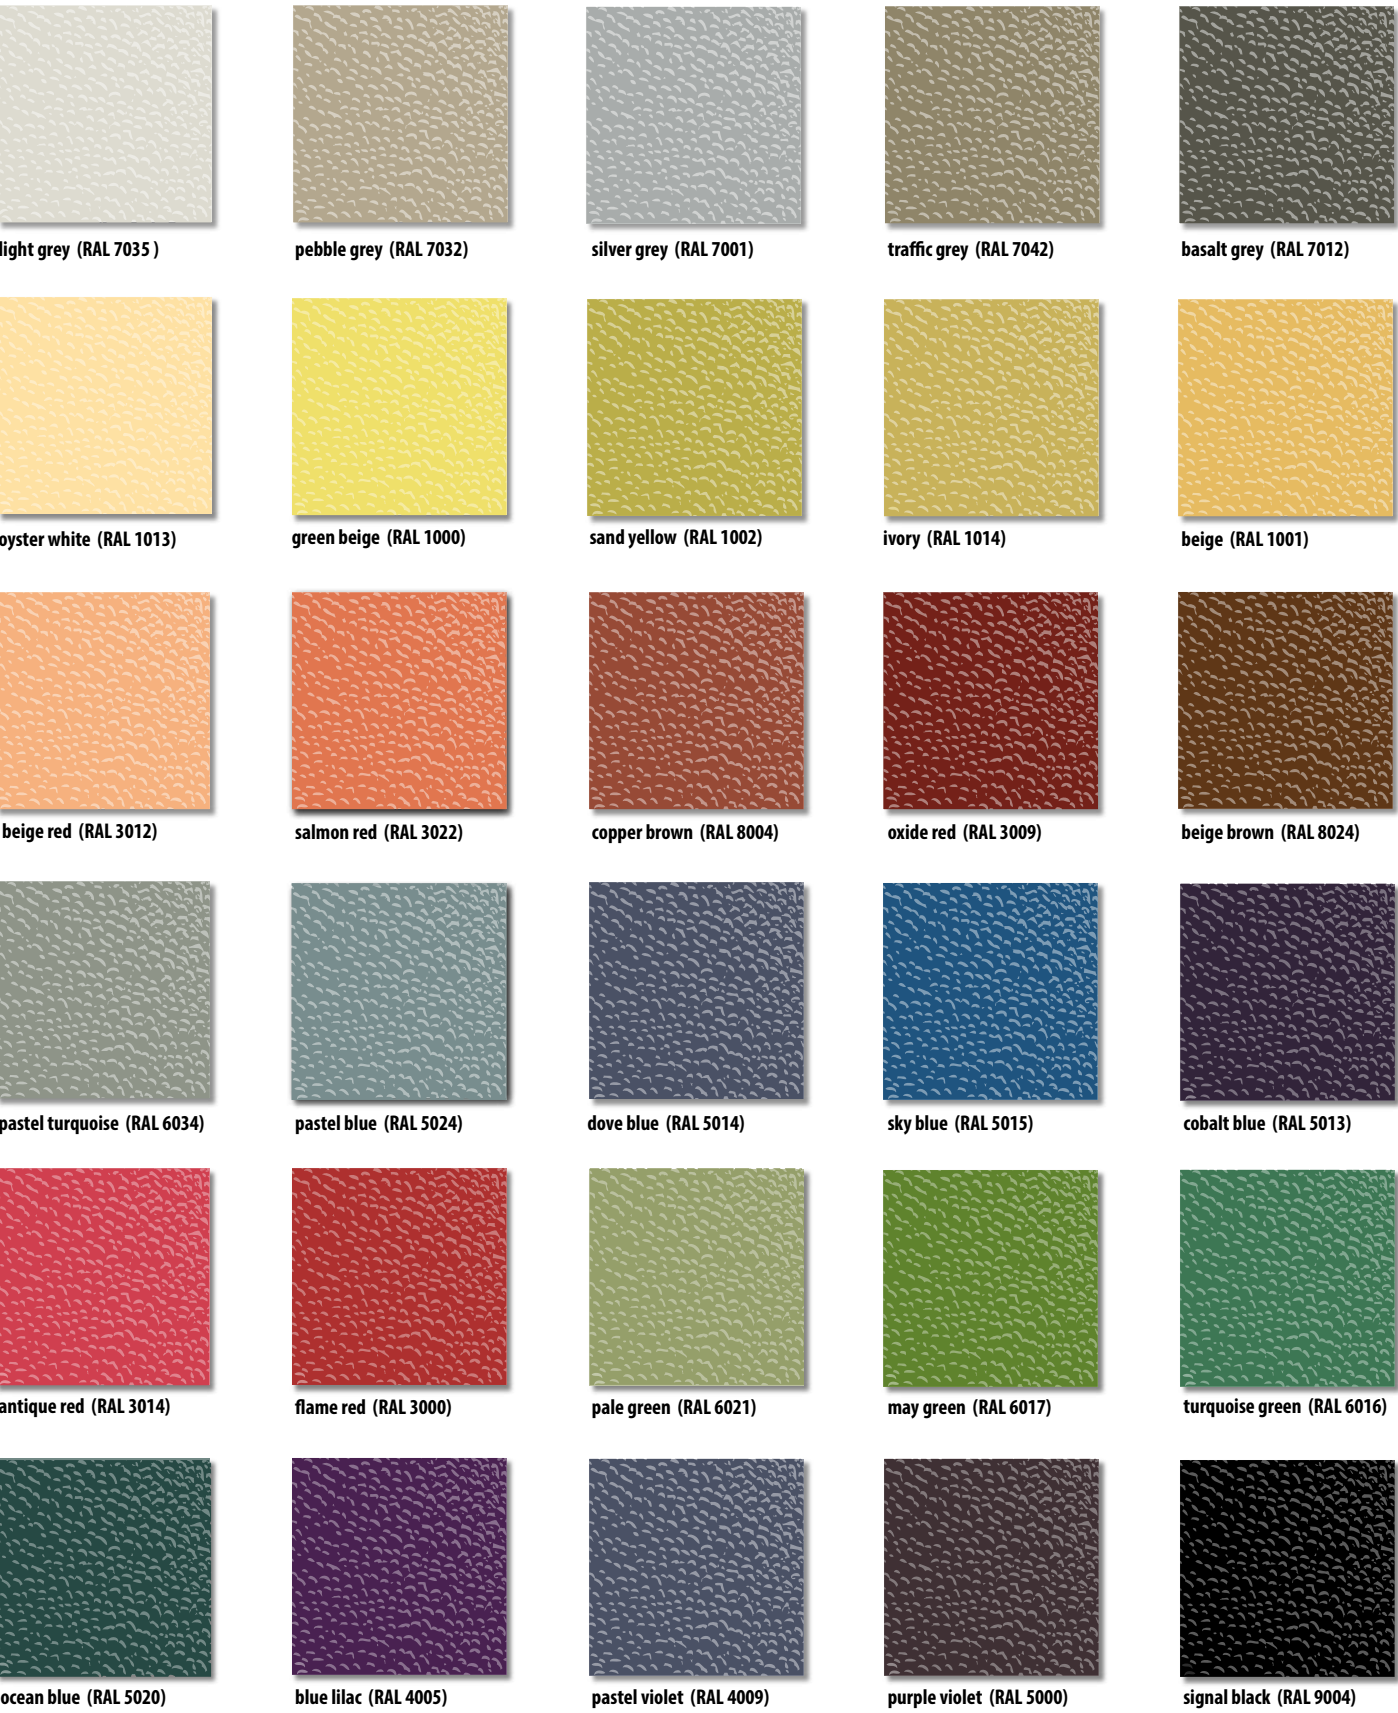

RAL colours mentioned are only intended for information purposes. Colour swatches or original colour swatch book are available upon request.



RAL colours mentioned are only intended for information purposes. Colour swatches or original colour swatch book are available upon request.






Flexible PVC puzzle edge mats for protection of floors underneath domestic exercise equipment, household use, workshops, garages or outdoors underneath roofs. Slip resistant surface with knobs. Easy to clean by sweeping or washing. Loose laying. Shock absorbing, reduces noise and vibration.

Basic Set
Approx. 1.5 sqm
Contents: 16 pieces
Art.-No. 14 645
6 tiles size 460 x 460 mm
10 sloped edges

Material: PVC
Colour: black
Total thickness: 4 mm
Stud height: 0,5 mm
Stud diameter: 22 mm

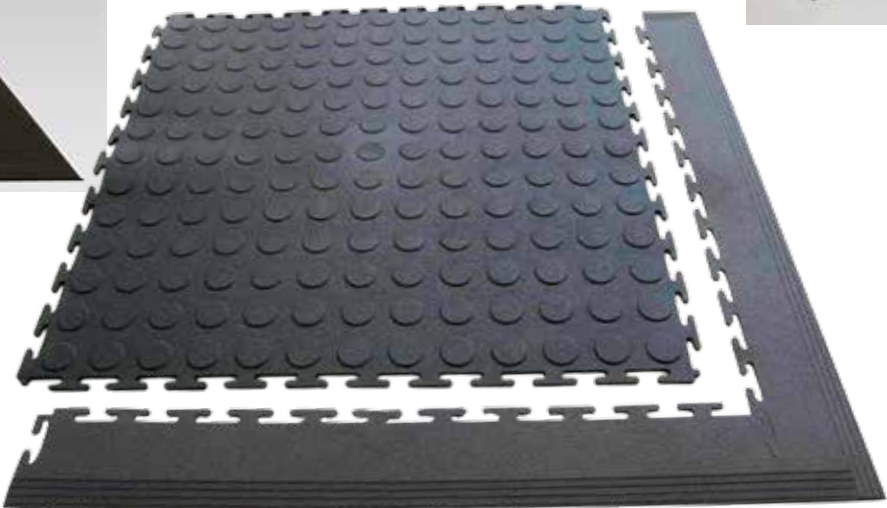

Slip resistant floor covering available in a range of surface designs. Ideal insulation against cold, heat and noise. Underside if required can be glued with a bonding agent. Rolls are available in many different colours.

Broad ribbed rubber rolls are ideal for agriculture, animal transport vehicles, in stables or for industrial use.



1 PRIMA® ROLL Fine Ribbed
The flat rib corrugation, running lengthwise protects floors and provides safety. The flat rib corrugation is designed for easy cleaning.
Material: Natural rubber
Colour: Black

Dimensions: 1 x 10 m
Thickness: 2.2 mm
Art.-No.: 12 404

Length: 10 m	
Thickness: 3.5 mm	
Width:	Art.-No.
1.00 m	12 420
1.25 m	12 421
1.50 m	12 422
1.83 m	12 423
2.00 m	12 424


Dimensions: 1.20 x 10 m
Thickness: 3 mm
Colour: Black
Art.-No.: 12 413



2 PRIMA® ROLL Medium Ribbed
Protects floors and promotes safety. Easy to clean, for general use.
Material: Natural rubber
Dimensions: 1 m x 10 m
Thickness: 4 mm

Colour	Art.-No.
black	12 405
red	12 515
blue	12 505

Dimensions: 1.20 x 10 m
Thickness: 3 mm
Colour: Black
Art.-No.: 12 412

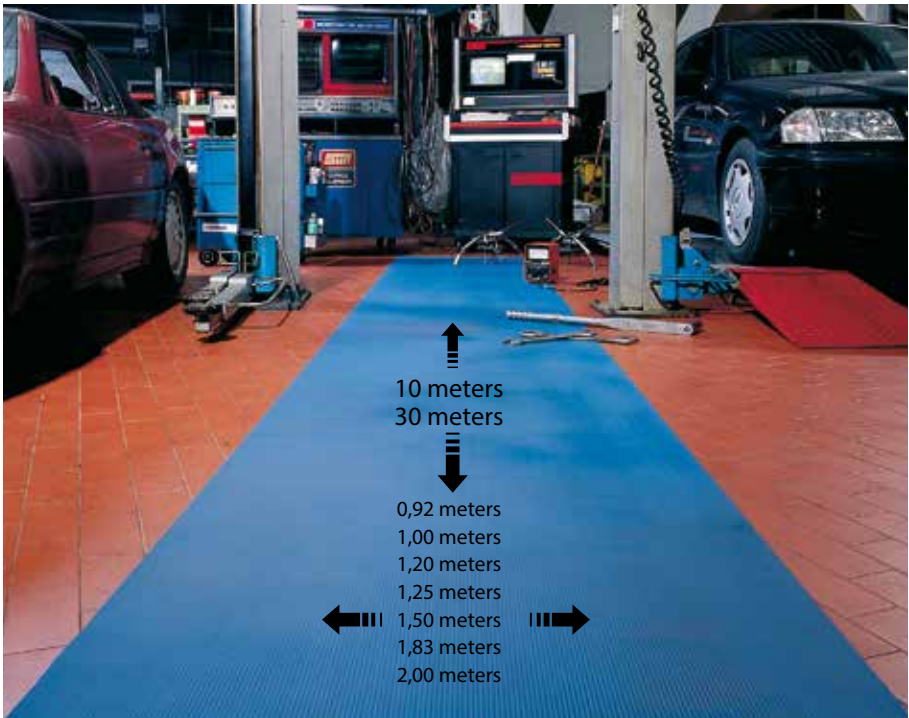

Rubber floor covering rolls are also available in oil resistant nitrile rubber, EPDM-rubber and with antistatic properties. Many designs also available in 15 meter length rolls.



3 PRIMA® ROLL Broad Ribbed
Surface design flat ribbed surface running lengthwise is easy to clean. Protects floors against damage. Ideal for commercial floors.
Material: Natural rubber
Colour: Black
Thickness: 3.5 mm
Length: 10 m

Width:	Art.-No.
1.00 m	12 430
1.25 m	12 431
1.50 m	12 432
1.83 m	12 433
2.00 m	12 434

Thickness: 3.0 mm
Length: 10 m

Width:	Art.-No.
1.20 m	12 410


Thickness: 5 mm
Length: 10 m

Width:	Art.-No.
1,50 m	12 442
1,83 m	12 443
2,00 m	12 444



4 PRIMA® ROLL Herringbone
Helps to provide added traction for employees and public for protection from slippery or wet surface. The ribbed surface design removes particles and moisture from shoes trapping them on the runners. Ideal for entrances, corridors, hall ways, aisles, in factories, office buildings and work stations.
Material: Natural rubber
Dimensions: 1 x 10 m
Thickness: 3.5 mm

Colour	Art.-No.
black	12 407
blue	12 507

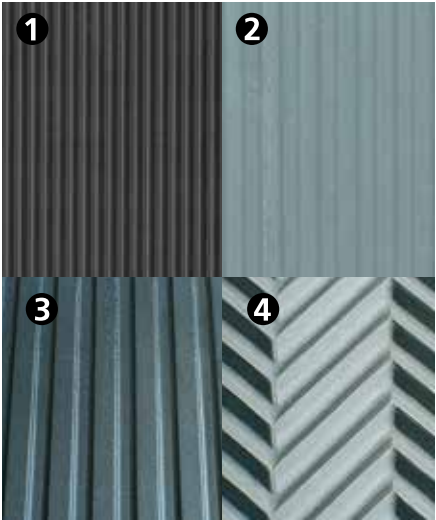



5 PRIMA® ROLL Pyramid

Primarily to be used where safety and floor protection are of major importance. Also can be used for ladders, tool boxes and shelf liners. Ideal for ramps, walkways, factories.

Material: Natural rubber
Colour: Black
Thickness: 3.5 mm
Length: 10 m

Width:	Art.-No.
1.25 m	12 512

6 PRIMA® ROLL Boucle Surface Design

Ideally suited for light duty applications providing a slip reducing surface.

Material: Natural rubber
Dimensions: 1 x 10 m
Thickness: 3.5 mm
Weight/roll: 40 kg

Colour	Art.-No.
black	12 401
grey	12 451
red	12 511

7 PRIMA® ROLL Diamond Surface Design

Deeply embossed steel-deck pattern matting rolls, provide extra safety on walkways and ramps.

Material: Natural rubber
Colour: Black

Width	Thickness	kg/roll	Art.-No.
1.00 m	4.5 mm	52.0	12 427
1.20 m	3.0 mm	63.0	12 414

8 PRIMA® ROLL Stud Surface Design

With standard studs. Ideal for heavy traffic areas, where floor protection and safety are important. Ideal for all floor areas. Shine surface.

Material: Natural rubber
Colour: Black
Dimensions: 1 m x 10 m
Thickness: 4.5 mm
Stud diameter: 24 mm
Weight/roll: 65 kg
Art.-No.: 12 426

9 PRIMA® ROLL Plain Surface Design

Ideal for floors and worktops. Can be easily cleaned. Absorbs noise and coldness.

Material: Natural rubber
Colour: Black
Dimensions: 1 x 10 m
Thickness: 3.0 – 3.5 mm
Weight/roll: 40 kg
Art.-No.: 12 409

10 PRIMA® ROLL Universal

Universally suitable rubber roll with 2 m width and a length of 30 meters for multi-purpose use:

- protection of buildings
- underlay for chain run vehicles
- in cow and horse barns
- milking stations
- event walkways and driveways
- hauliers
- special transport vehicles etc.

With textile inlay.



Surface: Turtle design
Underside: Ribs

Material: Rubber
Colour: Black
Thickness: 12 mm
Dimensions: 2 x 30 m max.
Weight: 16.2 kg/sqm
Art.-No.: 12 445

11 PRIMA® ROLL UTE

With slip reducing surface and knobs on the underside. Punched surface for best drainage of liquids.

Material: Rubber
Colour: Black
Thickness: 10 mm
Dimensions: 1.83 x 10 m
Weight/roll: 140 kg
Art.-No.: 12 798

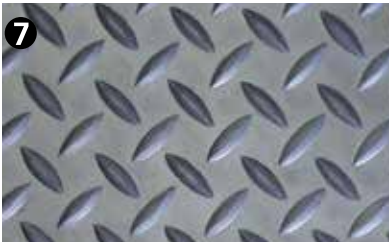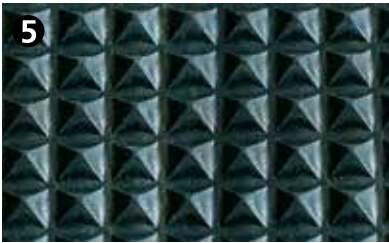

13 Pool mats:

- anti-fungal properties
- suitable for swimming baths, pools, shower rooms and saunas etc.

Mat is punched for better water drainage.

Material: Rubber with anti-fungal properties
Thickness: Min. 4 mm
Max. length: 10 m
Width: 1 m
Colour: Grey

Art.-No. 12 458


Can be produced in nitrile rubber or fire retardant B₁-s1 quality rubber. Suitable for saunas and warm areas of high humidity.



Top surface:
Slip reducing boucle design



Underside:
Water draining ribs

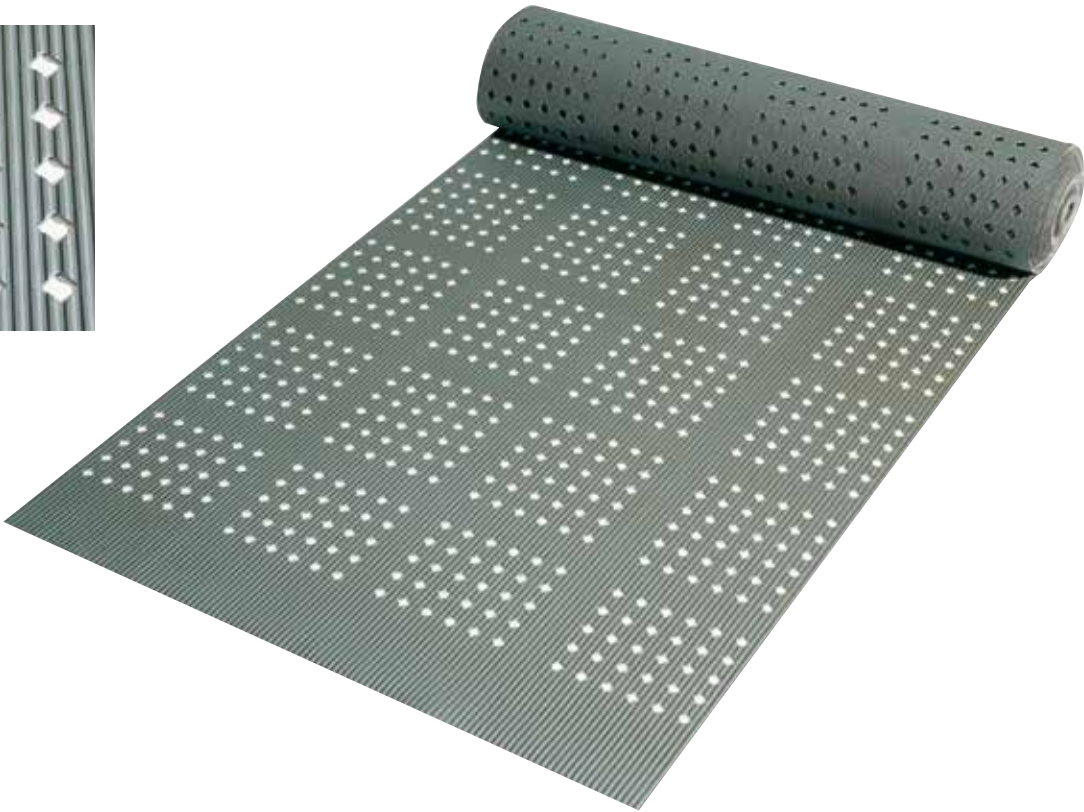




14 PRIMA® ROLL Fire



Ideal for fire hazardous areas, as the flooring is inherent with a combination of properties for resisting fire. Does not emit chlorine or chlorinated gaseous compounds, such as hydrochloric acid fumes, sulphur monochloride and chlorine etc. Very low smoke emission. Excellent resistance to general weathering conditions and has inherent ageing resistance. Tested according to EN 13501-1 by ÖTI – Test and Research Institute for Floor Technology/ Austria and classified B_{fl}-s1.

Material: NBR / Special polymer blend
Hardness: 60-65° Shore A
Colour: Black
Dimensions: 1 m x 10 m
Thickness: 2.7 mm +/- 0.3 mm
Surface: Micro-structured
Underside: Fabric finish
Art.-No. : 12 446

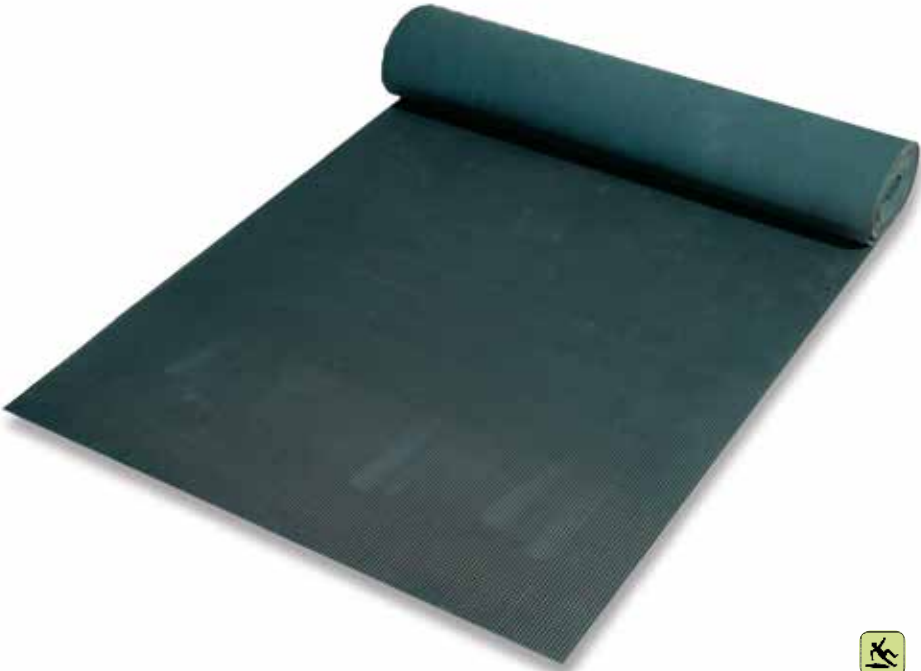

15 PRIMA® ROLL Welding/Grinding

Specially designed to resist welding flux and grinding sparks. Excellent durability and highly resistant surface for load bearing characteristics. Reduces fatigue during prolonged standing. Available with designs for non-slip surfaces.

Material: NBR / Special polymer blend
Temperature resistance: Sparks of 1300°C up to 1500°C for up to 3 seconds
Material hardness: 55-60° Shore A
Colour: Black
Dimensions: 1 m x 10 m
Thickness: 2.7 mm +/- 0.3 mm
Surface: Micro-structured
Underside: Fabric finish
Art.-No.: 12 447

16 PRIMA® ROLL Antistatic


Prevents the accumulation of static electricity by instantaneously draining the electro-static charges from workers. Specially designed to prevent dangerous sparks in volatile work environments. The resilient and load bearing characteristic of the mat offers excellent anti-fatigue features to the standing workers. For maximum effectiveness of the mat, ground the mat every 2.5 m and keep both surfaces free of dirt. Electrical resistivity range 1x10³ – 1x 10⁶ Ohms.

Material: NBR/NR blend
Material hardness: 55-60° Shore A
Colour: Black
Dimensions: 1 m x 10 m
Thickness: 2.7 mm +/- 0.3 mm
Surface: Micro-structured
Underside: Fabric finish
Art.-No.: 12 448

17 PRIMA® ROLL Grit

Specially designed surface of mat built with a coating of silicone carbide grit facilitates extra slip resistance. Provides excellent traction and avoids the danger of slipping. Surface covered with grit will drain liquids leaving mat dry. Resistance to wear and tear of heavy duty applications. Grit stripes of 5 cm width, at 15 cm intervals across the roll. Specially designed stair mats available with gritted strips for extra grip.


Material: NBR blend
Material hardness: 55-60° Shore A
Colour: Black
Dimensions: 1 m x 10 m
Thickness: 2.7 mm +/- 0.3 mm
Surface: Micro-structured
Underside: Fabric finish
Art.-No.: 12 449

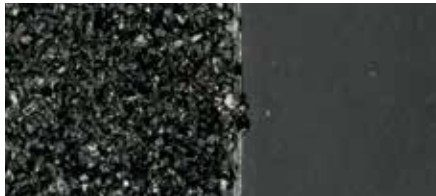

Slip resistant grit can be applied upon customer's requirement in custom made design or intervals.

14 15 16

17



18



18 PRIMA® Bloc Design Rolls

With flat, square blocs and excellent slip resistance due to structured underside surface. Liquids do not drain off.

Material: Synthetic vinyl
Colour: Green
Dimensions: 92 cm x 10 m
Thickness: 2.35 mm
Base thickness: 1.85 mm
Bloc height: 0.5 mm
Bloc diameter: 22 x 22 mm
Weight/roll: 21 kg
Art.-No.: 12 793

19 PRIMA® Rib Design Rolls


Diamond ribs with excellent slip resistance due to structured underside surface. Liquids do not drain off.

19



Material: Synthetic vinyl
Colour: Grey
Dimensions: 92 cm x 10 m
Thickness: 3.5 mm
Base thickness: 2.0 mm
Rib height: 1.5 mm
Weight/roll: 27 kg
Art.-No.: 12 796

20

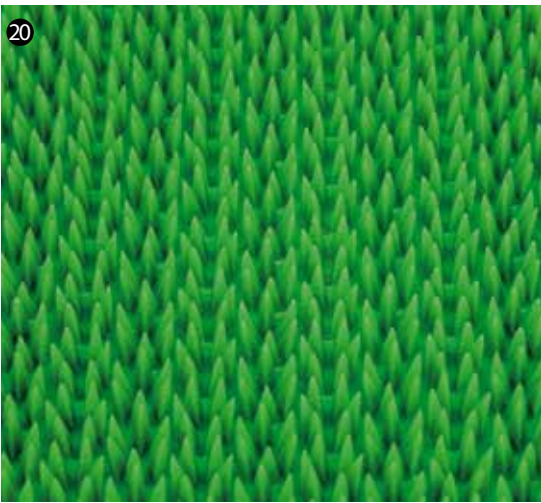

20 PRIMA® Synthetic Turf Rolls

Ideal for gardens and balcony. Rolls with excellent slip resistance due to structured underside surface. Liquids do not drain off. With flat edge on both sides.

Material: Synthetic vinyl
Colour: Green
Dimensions: 120 cm x 10 m
Thickness: 12 mm
Weight/roll: 42 kg
Art.-No.: 12 792

19



Material: Synthetic vinyl
Colour: Silver
Dimensions: 92 cm x 10 m
Thickness: 3.5 mm
Base thickness: 2.0 mm
Rib height: 1.5 mm
Weight/roll: 31 kg
Art.-No.: 12 795

PRIMA® Paver Bone Shape



Elastic, impact absorbing rubber granule bone design paver. Secure puzzle linkages and the weight of the paver hold the mats in place. Dampens sound and rough surface for secure step, with smooth underside. Can be used with or without bonding adhesives.

Weather and abrasion resistant. Self draining with slip reducing properties to help prevent accidents.

Rubber granule paver tiles can be installed on any solid surface or on sand surface when no heavy loads are applied.



Ideal to be used in children’s play areas, schoolyards, gardens, golf courses, animal shelters, horse barns, swimming pools etc. Suitable for indoor and outdoor use.

Material: Rubber granules with a polyurethane combination. Does not contain Lindan, Formaldehyde or PCB.

Underside: Smooth
Temperature range: -40°C up to +110°C

1 Thickness: 10 mm
Weight: 11.5 kg/piece
Dimensions: 111.65 x 113.25 cm
5 x 8 optical bone elements

Colour	Art.-No.
black	14 640
red	14 641
green	14 642

2 Thickness: 20 mm
Weight: 12.3 kg/piece
Dimensions: 90 x 86.5 cm

Colour	Art.-No.
red	12 686
green	12 687



Rubber Dog Bone Paver



Individual bone pavers supplied in easy to carry cartons. Can be installed on any surface. Optimum water draining.

Material: Rubber granule, PU bonded.
Temperature range: -40°C up to +90°C
Dimensions: 16 x 20 cm



Paver Edge
Straight edges for dog bone paved areas, “full and half elements.”
Length: 110 cm

Thickness: 23 mm
Contents per carton: 6 pieces for 660 cm

Colour	Art.-No.
1 black	14 680
2 red	14 681
3 green	14 682

Thickness: 43 mm
Contents per carton: 3 pieces for 330 cm

Colour	Art.-No.
1 black	14 685
2 red	14 686
3 green	14 687

Rubber Dog Bone Paver Elements
Thickness: 23 mm
For hard, resilient surface, i.e. concrete, asphalt etc.
Contents per retail carton: 28 elements to cover 0.75 sqm

Colour	Art.-No.
1 black	12 692
2 red	12 694
3 green	12 697

Thickness: 43 mm
For loose fill, road base, sand etc.
Contents per retail carton: 14 elements to cover 0.38 sqm

Colour	Art.-No.
2 red	12 684
3 green	12 688



Paver Ends
Elements for a straight end.
Length: 120 cm

Thickness: 23 mm
Contents per carton: 6 pieces for 720 cm

Colour	Art.-No.
1 black	14 670
2 red	14 623
3 green	14 671

Thickness: 43 mm
Contents per carton: 3 pieces for 360 cm

Colour	Art.-No.
1 black	14 673
2 red	14 674
3 green	14 675




PRIMA® Paver Quart


Impact absorbent rubber granule pavers with profiled underside for good self drainage and shock absorbency. Easy to lay due to square shape. Indoors or outdoors and entrances, balconies, children's playground areas, walk ways, animal enclosures, agriculture, working places etc. Heavy duty, noise reducing and excellent insulation on any kind of floor. Can be laid on solid surface. Material is non-toxic and environment friendly. Self draining. Suitable for playgrounds.

Material: PU bonded rubber granules

Underside: With water drainage, elastic grooves
Temperature range: -40°C up to +90°C

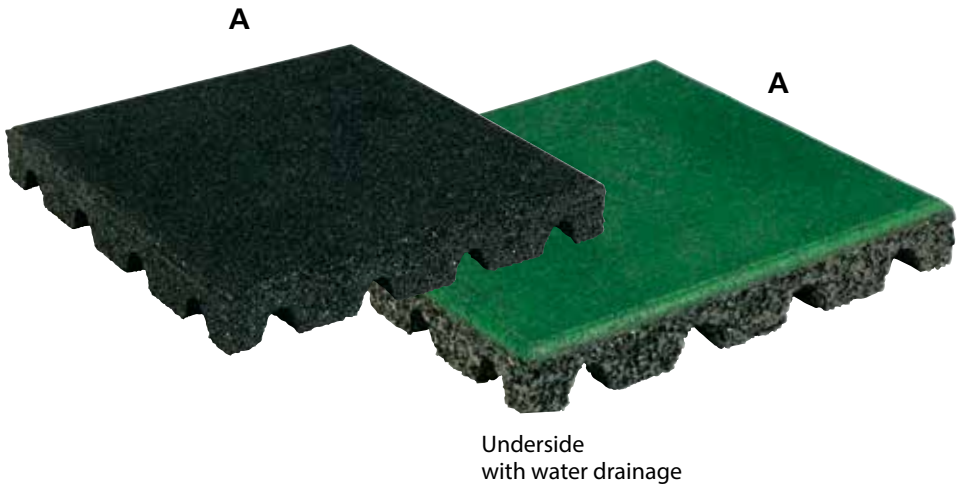

A	
Dimensions: 50 x 50 cm	
Thickness: 75 mm	
Colour	Art.-No.
black	14 696
red	14 625
green	14 698

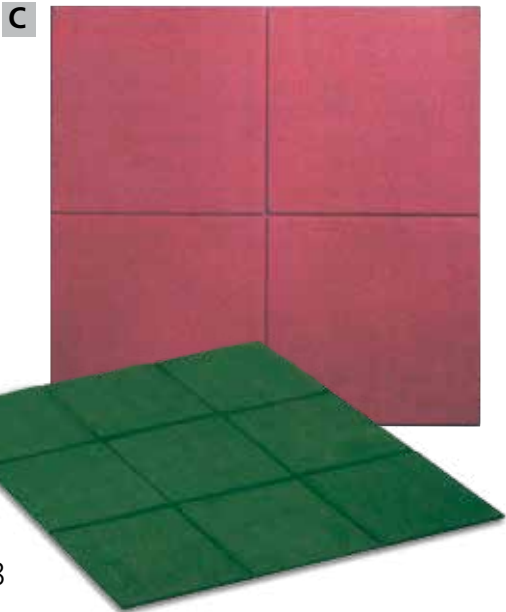

C Dimensions: 100 x 100 cm	
Thickness: 65 mm	
Colour	Art.-No.
black	14 655
green	14 657



Underside with water drainage



PRIMA® Paver

PRIMA® Paver Hexagon Shape



Material: Rubber granules with a poly-urethane combination. Does not contain Lindan, Formaldehyde or PCB.

Thickness: 10 mm
Weight: 8.8 kg/sqm
Dimensios: 100 x 50 cm
Temperature range: -40°C up to +110°C

Colour	Art.-No.
1 black	12 690
2 green	12 693

Extremely elastic, impact absorbing rubber granule mats. Dampens sound and rough surface for secure step, with smooth underside. Weather and abrasion resistant.

Water resistant with slip reducing properties to help prevent accidents.


Rubber granule paver tiles can be installed on sandy surface, concrete or tar. Can be used with or without bonding adhesive.

Ideal to be used in many areas: Children's play areas, schoolyards, health clubs, golf courses, animal shelters, around swimming pools, parking lots, walkways and balconies etc. Suitable for indoor and outdoor use.

PRIMA® Paver Bottle Shape



Thickness: 15 mm	
Weight: 0.35 kg/piece	
Colour	Art.-No.
1 black	14 890
2 red	14 891
3 green	14 892

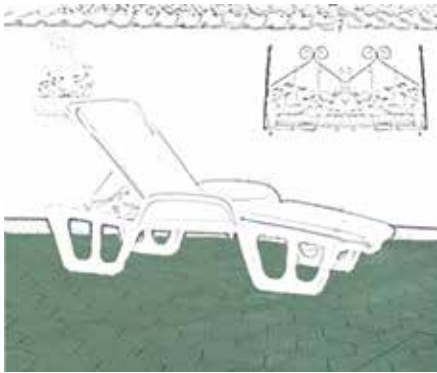


Hygienic Shoe Disinfectant Mat



Loose laid rubber tray mat for cleaning and disinfecting shoes and boots at the sole and by the sides. Cleaning action of boot soles is ensured by hundreds of strong, elastic moulded bristles on the bottom of the tray. Will hold around 10 liters of disinfectant cleaning liquid to prevent dirt, biological infections or cross contamination. The ideal mobile bio-security tray for use in the food industry, animal breeding and farms, laboratories, hospitals, task forces and others.

Material is strong and durable for use at different locations, transport and heavy traffic. Will securely stay in place due to its own weight.

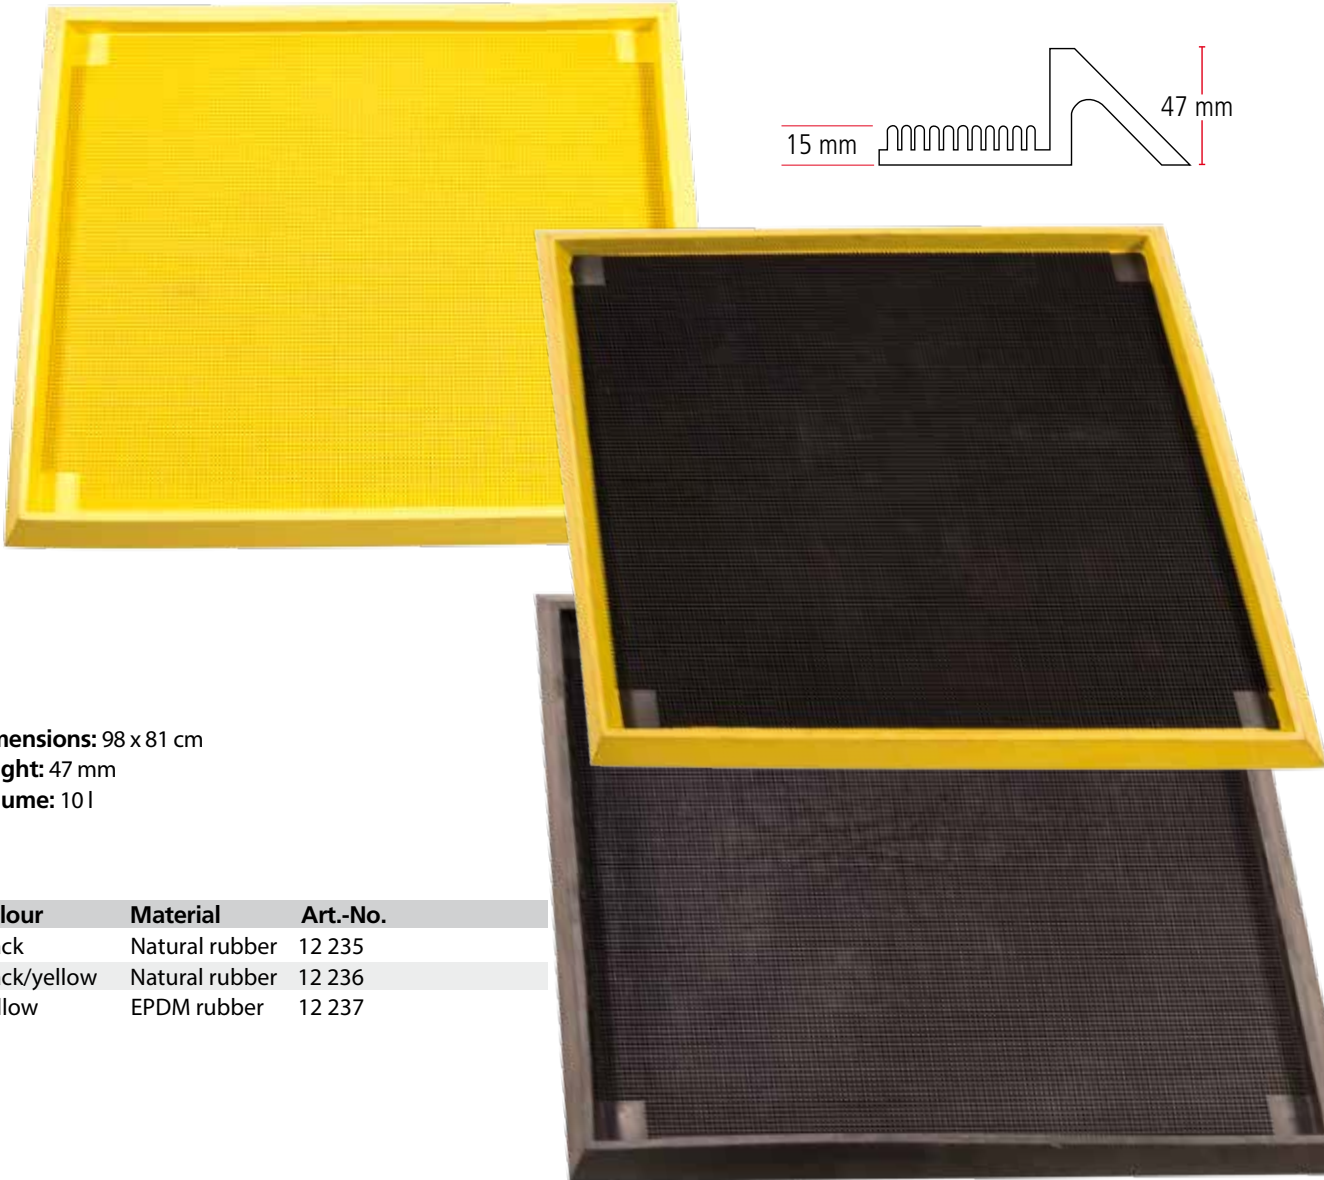

Dimensions: 98 x 81 cm
Height: 47 mm
Volume: 10 l

Colour	Material	Art.-No.
Black	Natural rubber	12 235
Black/yellow	Natural rubber	12 236
Yellow	EPDM rubber	12 237

Impact Absorbing System

Each footstep during standing or walking releases a weight force of up to 200 kg. This is normally distributed up the heels to the leg muscles and up to the spinal column. To this weight impact, the human body reacts with pain and fatigue, which will eventually lead to spinal column and joint disorders and also to a decline in worker productivity.



Material hardness: 38° +/- 3° Shore soft impact absorbing system
achieve optimal relief from leg strain when standing at work.

Material hardness: 58° +/- 3° Shore with harder impact absorbing system
for work involving standing and walking.

With yellow sloped edge
made from yellow vulcanised rubber. Provides safety at work places where keeping "inside the lines" is part of good manufacturing practise.

Materials available:
Natural rubber
Nitrile rubber resistant to oils and many chemicals, acids and alkalines. Suitable for working places in the food and chemical industry.
Tested for fire retardant B_{fl}-s1 and suitable for contact with hot metal chips.
EPDM-rubber suitable for outside and extreme temperatures.
Antistatic properties , Temperature range: -30°C up to +110°C
Anti-fungal

Dimensions: 80 x 80 cm
Thickness: 13.5 mm
Weight: Approx. 4.5 kg/ mat depending on material

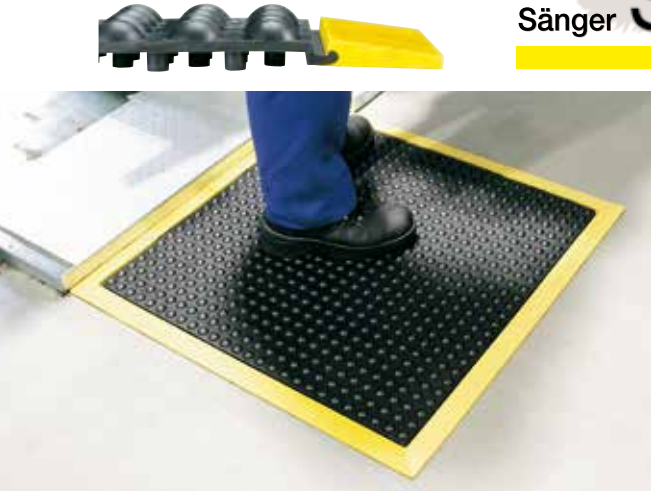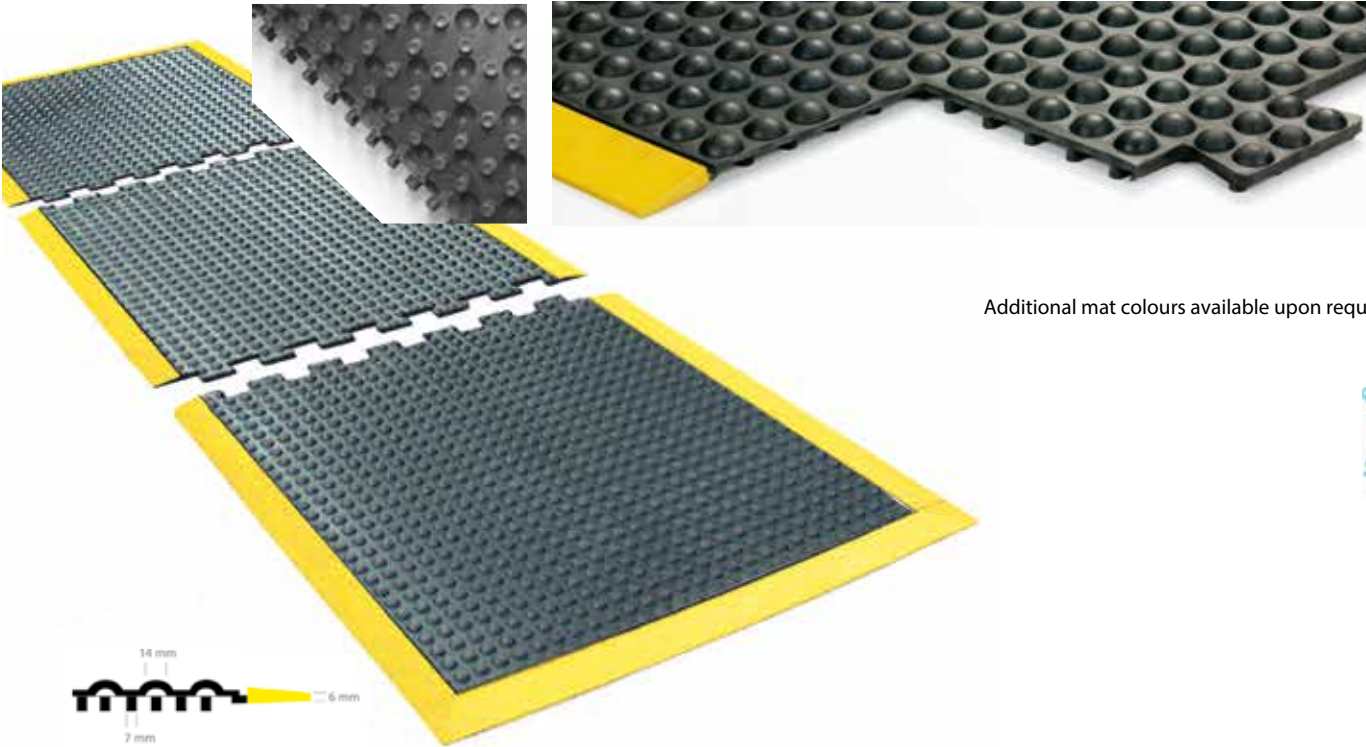

Natural rubber 58° Shore harder impact absorbing sytem
B. Single mat – colour: black yellow
sloped edge black yellow


Material	Art.-No.	Art.-No.
Natural rubber	12 940	12 960

Natural rubber 38° Shore softer impact absorbing system grey
sloped edge grey yellow

Material	Art.-No.	Art.-No.
Natural rubber		
B. Single mat	12 720	12 740
D. End piece	12 721	12 741
F. Middle piece	12 722	12 742

Black
sloped edge black yellow

Material	Art.-No.	Art.-No.
Natural rubber		
B. Single mat	12 710	12 730
D. End piece	12 711	12 731
F. Middle piece	12 712	12 732
I. Edge piece	--	12 733
G. central piece	12 714	--
K. corner piece	--	12 735

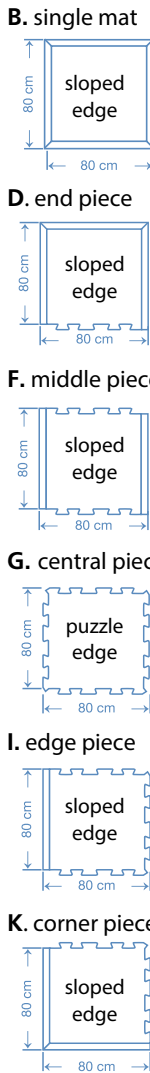

Additional mat colours available upon request.





Material hardness:
55° Shore harder
impact absorbing system,
which allows movement with
light weight trolleys,
long durability.


Dimensions: 80 x 70 cm
Thickness: 12 mm
Colour: Black
Weight: Approx. 4.5 kg / mat
depending on material

Anti-fatigue mat with air padded underside and slip-resistant diamond shaped top surface. Will relieve from spinal column and joints during long hours of walking and standing at the place of work. Insulates legs and body against the cold from exposed floors.

	Mat	Edge	B. Individual mat	D. End piece	F. Middle piece
Material	Colour	Colour	Art.-No.	Art.-No.	Art.-No.
Natural rubber	black	black	12 910	12 911	12 912



1 Slip resistant surface, punched base
Easy to clean, with ribbed underside for
easy draining of fluids.

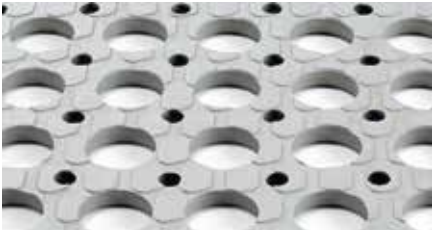

2 Anti-Stress, unpunched base
Slip resistant surface design with air
pockets relieves strain on the spinal
column and reduces fatigue.



3 Ribbed surface, punched base
For optimum cleaning effect.



4 Ribbed surface, unpunched base
For thorough cleaning. Unpunched base
traps dirt for easy removal.



Economical and practical rubber floor mat,
both sides of mat can be used as a top
surface:

- entrance halls
- catering and food preparation
- workplace
- factory floors
- transport vehicles

Thickness: 10 mm
Colour: black
Weight: Approx. 10 – 12 kg depending on
edge and base type
Material: Natural rubber



Sloped edges
150 x 100 cm / 10 mm

The Nova® mat with sloped edges
provides a comfortable and safe work
environment without the danger of
tripping.

1 Slip-resistant, punched base black

Material	Art.-No.
Natural rubber	
B. Single mat	12 462
D. End piece	14 420
F. Middle piece	14 421
I. Edge piece	14 422
K. Cornerpiece	14 423

1 and 3 punched base black

Material	Art.-No.
Natural rubber	
A. Single mat	12 460
D. End piece	14 400
F. Middle piece	14 401

2 and 4 unpunched base black

Material	Art.-No.
Natural rubber	
A. Single mat	12 465
H. Edge piece	14 412

2 and 4 unpunched base grey

Material	Art.-Nr.
Natural rubber	
A. Single mat	12 475

3 Ribbed surface, punched base black

Material	Art.-No.
Natural rubber	
B. Single mat	12 463
D. End piece	14 440
F. Middle piece	14 441

4 Ribbed surface, unpunched base

Material	Art.-No.
Natural rubber black	
B. Single mat	12 468

B. Sloped edges
150 x 100 cm / 10 mm –
Natural rubber, antistatic
R_G10⁶-10⁷ Ohm DIN EN 61340-4-1

2 Anti-Stress, unpunched base
Black with black sloped edge

Type	Art.-No.
D. end piece	14 430
F. middle piece	14 431 8006



B. Safety edge mat 150 x 100 cm / 10 mm

Yellow colour rubber sloped edge is securely vulcanized together with the Nova® mat. Yellow colour sloped safety edges prevent tripping. Available with 1, 2, 3 or 4 sides sloped edges or different edge combinations upon request.

2 Anti-Stress, unpunched base

Material	Art.-No.
Natural rubber	
B. Single mat	12 667

4 Ribbed surface, punched base

Material	Art.-No.
Natural rubber black	
B. Single mat	12 668

Single mat grey

Material	Art.-No.
1 Natural rubber	12 472
2 Natural rubber	12 477
3 Natural rubber	12 473

G. Central piece grey

Material	Art.-No.
1 Natural rubber	12 471
2 Natural rubber	12 476

G. Puzzle edge 150 x 100 cm / 10 mm

The Nova® puzzle edge mat provides secure connections on one, two, three or all sides, enabling to lay on large areas, the workplace and walkways. The puzzle system locks the mats together and keeps them in place without moving.

1 and 3 punched base

Material	Art.-No.
Natural rubber	
G. Central piece	12 461

2 and 4 unpunched base


Material	Art.-No.
Natural rubber	
G. Central piece	12 466




Additional sizes and colours available.

Mats with different edge types are available as featured. Custom made edge combinations possible.


A. single mat




B. single mat




C. end piece




D. end piece




E. middle piece




F. middle piece




G. central piece




H. edge piece




I. edge piece



K. corner pi-



K. corner piece



JOLLY

Comfortable vinyl foam cushioned mat with closed cell pebble design top layer to provide higher wear resistance. Ideal insulation for feet and legs against cold and dampness on concrete or metal floors. Reduces pressure on spinal column, legs and feet due to low density structure providing underfoot cushioning. Comfortable and easy cleaning with water and mild detergents.

Colour: Black

Thickness: 9.5 mm

Material hardness: 40° Shore

Dimensions	Art.-No.	Weight
90 x 60 cm	12 240	2.3 kg
yellow coloured edge: short side		

Dimensions	Art.-No.	Weight
150 x 90 cm	12 242	5.1 kg
yellow coloured edge: long side		

Jolly Rolls

18-meters

Ideally suited for areas with high levels of foot traffic where staff has to walk long distances, i.e. alongside assembly lines and production walkways. Yellow edges marking on the long sides of the rolls prevents accidents.

Colour: Black with yellow safety edges on either side

Thickness: 9.5 mm

Material hardness: 40° Shore

Dimensions	Art.-No.	Weight/ linear meter
60 x 18 m	12 243	2.4 kg
90 x 18 m	12 244	3.4 kg
120 x 18 m	12 245	4.4 kg

BELLA/SANO

Comfortable vinyl foam cushioned mat with closed cell top layer with ribbed design to provide higher wear resistance. Cushioned underside reduces pressure from spinal column, ligaments and feet. Insulates feet from cold or damp floors. Ideal for areas where operators are turning and standing regularly. To be cleaned with water and mild detergents. Slip resistant ribbed surface.


Colour: Black

Thickness: 9.5 mm

Material hardness: 40° Shore

BELLA

Dimensions	Art.-No.	Weight
90 x 60 cm	12 846	2.3 kg

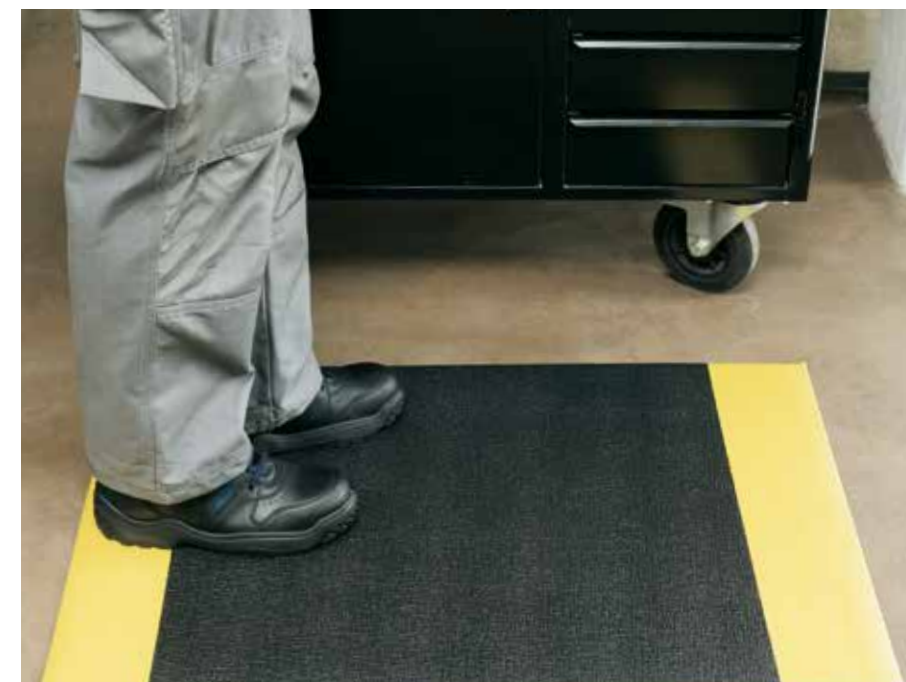

BELLA



SANO



SANO

Dimensions	Art.-No.	Weight
90 x 60 cm	12 908	2,3 kg



CONDOR



Vinyl anti-fatigue workplace mat with diamond surface structure. Sloped edges on all 4 sides to prevent tripping. Yellow coloured edges on both long sides or on both short sides for additional safety. Foamed underside provides anti-fatigue comfort. Easy to clean with water and mild detergents. Resistant against many industrial chemicals.

Colour: Black with yellow safety edges
Thickness: 9.5 mm
Material hardness: 45° Shore

Dimensions	Art.-No.	Weight
90 x 60 cm	12 906	4 kg
yellow coloured edge: short sides		



MARMOR TOP




Anti-fatigue workplace mat with marble design smooth top surface structure and foamed underside to provide relieve on joints and spinal column with every footstep. Four sloped edges prevent tripping. Smooth surface can be cleaned easily with mild detergent. Vinyl material is resistant to many industrial chemicals.

Thickness: 9.5 mm
Material hardness: 45° Shore



Dimensions	Colour	Art.-No.	Weight
90 x 60 cm	grey	12 811	4.5 kg
90 x 60 cm	blue	12 812	4.5 kg
90 x 60 cm	black	12 813	4.5 kg
Dimensions	Colour	Art.-No.	Weight
150 x 90 cm	grey	12 814	10.5 kg
150 x 90 cm	blue	12 816	10.5 kg
150 wx 90 cm	black	12 817	10.5 kg

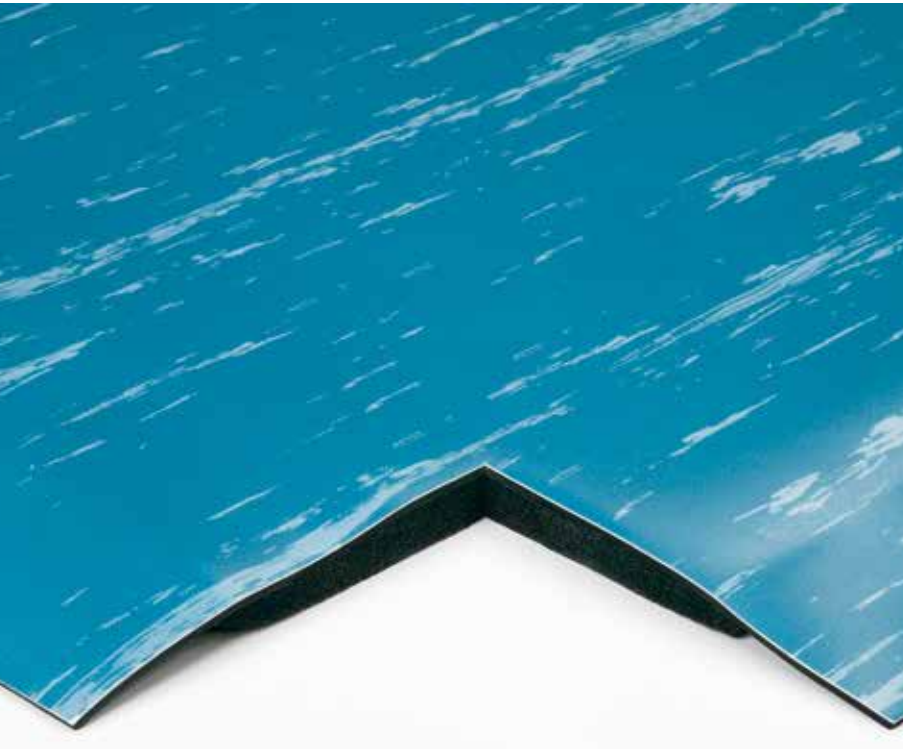

Chair Mats




Floor Protector Chair Mats for Hard Surface Floors

Ideal protection of hard surface floors, i.e. parquet, cork, wood, linoleum, felt, tiled floors, rubber and other hard floors.

- prevents scratches from chair legs and wheels
- prevents dirt
- prevents spots from dirty shoe soles
- prevents the floor top surface from damage

Neutral, transparent design. With rounded edges. Excellent chair mobility. Chairs do not leave pressure mark behind.

Material: Synthetic vinyl
Long life thickness: 2.9 mm

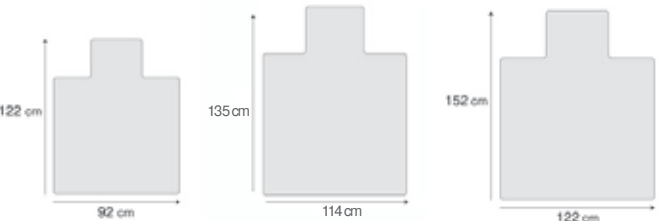

Floor Protector Chair Mats for Carpets

Protects all types of carpets perfectly against chair wheels, chair legs, dirty shoe soles etc. Blunt knobs on the underside keep the chair carpet protector in place and prevent development of wavy surface.

- minimise wear and tear of carpets
- prevent dirt marks
- no marks from slipped food or liquid

Neutral, transparent design. With rounded edges. Excellent chair mobility. Chairs do not leave pressure mark behind.

Material: Synthetic vinyl
Long life thickness: 2.9 mm

Dimensions LxW Art.-No.	
122 x 92 cm	12 646
135 x 114cm	12 643
152 x 122 cm	12 645



Rubber Threshold Ramps

NR

The ideal ramp solutions for buildings, staircases or other applications where different floor height levels have to be overcome. No weight limitations for wheel chair, wheel trolley etc. Attractive finish. Made of 100% rubber for quick and cost effective installations. Extremely durable and easy maintenance. Installed in minutes with or without adhesive.

Material: Rubber
Colour: Black
Temperature range: -40°C up to +90°C



Rubber Ramps, 3-sides sloped

Art.-No.	Max. height approx. mm	Width approx. mm	Depth approx mm	Weight approx. kg
14 632	15	900	120	1.35
14 633	25	900	200	3.1
14 635	35	900	280	5.9
14 636	50	900	400	11.0
14 637	75	900	600	18.0
14 638	100	900	800	31.0
14 639	125	900	1000	51.0
14 631	25	1010	200	3.55
14 630	50	1140	400	12.0
14 543	22	1067	203	3.8
14 541	32	1067	305	7.3
14 542	44	1270	457	17.0
14 634	56	1524	610	28.0

Rubber Ramps, wedge-type

14 629	89	457	533	13.0
14 628	57	914	343	11.0
14 540	57	762	762	21.5
14 544	4	1000	40	0.2
14 545	6	1000	60	0.4
14 546	8	1000	80	0.6
14 547	10	1000	100	0.8
14 548	12	1000	110	1.1
14 549	16	1000	150	2.0
14 553	20	1000	150	2.3
14 554	24	1000	150	2.5

- recommendet for outdoor area
- recommendet for inner area



NR



Cable Hump
Cables and hoses or pipes can be crossed by vehicles without damaging them. Ramp is made of rubber. Easy to drive over. Available in colour black and yellow.

Material: Rubber
Dimensions: 20.5 cm x 1.50 m
Height: 60 mm
Hole diameter: 45 mm

Colour	Art.-No.	Price p. piece
black	14 535	
yellow	14 536	



Please inform with your order: required total length or number and colours of required elements.

Material: Rubber without load limitation
Height: 75 mm

Element 1: End piece, colour: black
Dimensions: 30 x 40 cm
Art.-No.: 14 530


Element 2: End piece, colour: yellow
Dimensions: 30 x 40 cm
Art.-No.: 14 531

Element 3: Center piece, colour: black
Dimensions: 50 x 40 cm
Art.-No.: 14 532

Element 4: Center piece, colour: yellow
Dimensions: 50 x 40 cm
Art.-No.: 14 533



Speed Humps
Individual elements which can be connected by a mat connector system with options for road fixation. Center and end pieces available in different colours. For outdoor or indoor use with excellent durability. Hollow duct size 25 mm height and 100 mm width for cables or pipes.

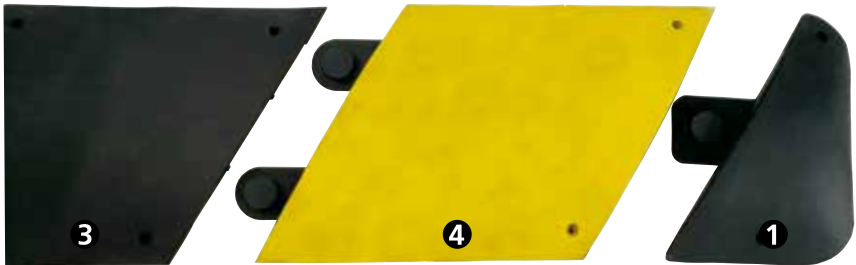

Dock Bumpers
To keep trucks or loading bay walls free from damage. 4 holes for easy wall mounting. Made of 100% rubber.
Material: Rubber
Dimensions: 46 x 25 cm
Thickness: 11 cm

Colour	Art.-No.
black	14 537



Front side Reverse side



- Protects the ground from damage: gras, soil, tared roads
- Prevents marks or damage from chains or wheels
- Depending on vehicle width use one mat for one chain or wheel or one mat for both chains or wheels
- Suitable for grounds in parks, farming, yards, roads, municipality or sportsgrounds
- Suitable for protection of concrete floors in vehicle halls, exhibition halls or garages from vehicles with snow chains or other chain driven vehicles
- Ideal protection of loading platforms or transport vehicles

Material: Rubber
Dimensions: 120 cm x 183 cm
Thickness: 19 mm
Weight: 56 kg
Art.-No. 14 604

- Properties:**
- With textile inlay for reinforcement of rubber material
 - Turtle design surface for anti-slip properties
 - Ribbed underside for good drainage of liquids
 - Easy transport by 2 triangular holes to insert chain hooks



Top surface



Underside



Textile inlay



Equestrian Requirements



Rubber Stable Mat

Specially designed for slip free standing and walking of horses with cushioning effect for the legs. Underside with drainage ribs. Can be equally used for horse walkers, wash boxes and transport vehicles. Protects the horse from injury when laying down.

Material: Rubber, urine resistant
Colour: Black
Dimensions: 120 cm x 183 cm
Thickness: 17 mm
Weight: 40 kg
Art.-No. 14 603




Wall Protector for Stables and Trailers

Insulating wall covering prevents animals getting injured. Can be fixed by glueing or wall mounting attachment.

Material: EVA rubber
Dimensions: 100 cm x 100 cm

Colour:
 Emerald green
Thickness: 25 mm
Weight: 3 kg
Art.-No. 14 611

Colour: Black
Thickness: 23 mm
Weight: 2.8 kg
Art.-No. 14 616

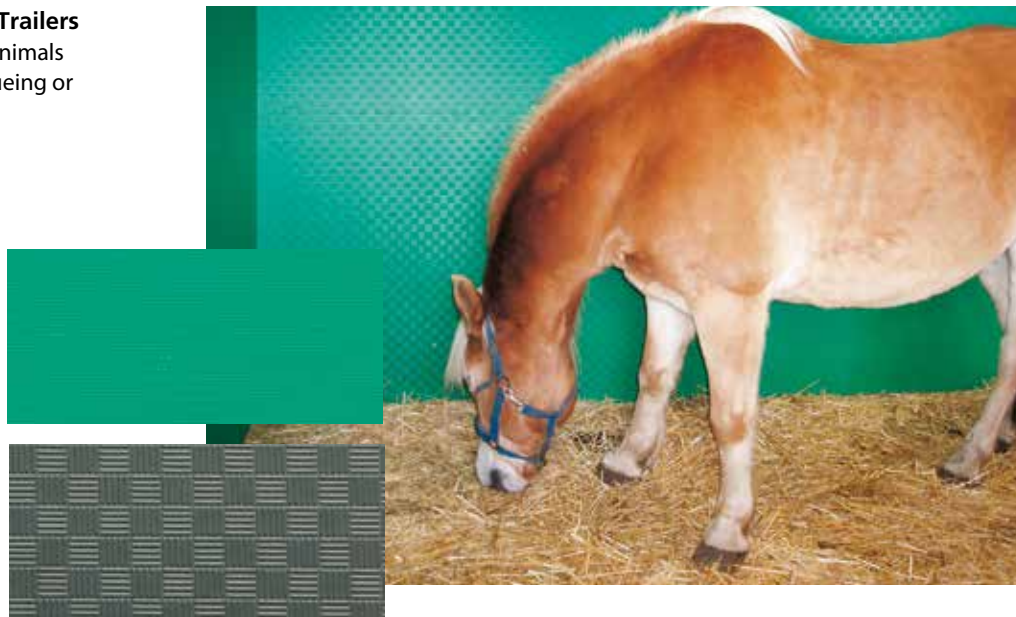

OKTA

Rubber mat with punched base for ideal water drainage. Robust quality for inside and outside installations. Suitable for extremely heavy usage. Temperature resistant from -50°C up to +100°C. Urine resistant. Can be used for washing places.

Material: Natural rubber
Colour: Black
Dimensions: 150 cm x 100 cm
Thickness: 23 mm
Weight: 20 kg/piece
Art.-No. 12 105



Prepare the underground with sand and pebble stones or gravel layers. Install the mats and connect them by mat connectors.



Fill the mats with sand: liquids and rain water can drain well. Dirt can be collected.

Equestrian Requirements



Ramp Covers


Suitable for horse and animal trailers and transport vehicles. With alternating rib structure for good grip of animal legs.

Material: Natural rubber
Colour: Black

① Dimensions:
 Depth 155 x Width 175 cm
Thickness: 12 mm
Weight: 35.5 kg/piece
Art.-No.: 14 606



② Dimensions:
 Depth 122 x Width 240 cm
Thickness: 27 mm
Weight: 45 kg/piece
Art.-No.: 14 607

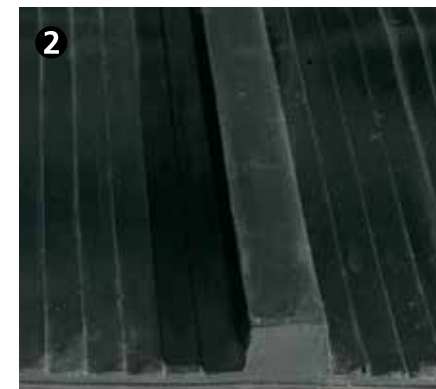

Top surface



Underside

Trailer Flooring

Rubber flooring with turtle surface, specially designed for horse trailers and transport vehicles. Urine and liquid resistant. Insulating and comfortable for the horse. Can be cut to desired size.

Material: Natural rubber
Colour: Black
Dimensions: 150 x 300 cm
Thickness: 6 mm
Weight: 35 kg/piece
Art.-No. 14 602

PRIMA® Roll Universal

with turtle top surface and ribbed bottom. 2 m wide rubber roll mat is ideal for horse stables, dairy farming, pig stalls and walk ways. With textile inlay.

Material: Rubber
Colour: Black
Dimensions: 2 x 30 m
Thickness: 12 mm
Weight: 17 kg/sqm
Art.-No. 12 445

Rubber Underlay Mats

NR



NR




Rubber Granule Mat
Ideal mat to use as anti-vibration, insulation and sound absorbing underlayer underneath washing machines, clothes dryers, fridges and freezers.

Material: Natural rubber
Colour: Black
Dimensions: 60 x 60 cm
Thickness: 15 mm
Weight: 5.3 kg
Art.-No. 12 709



Technical Rubber Products

NR

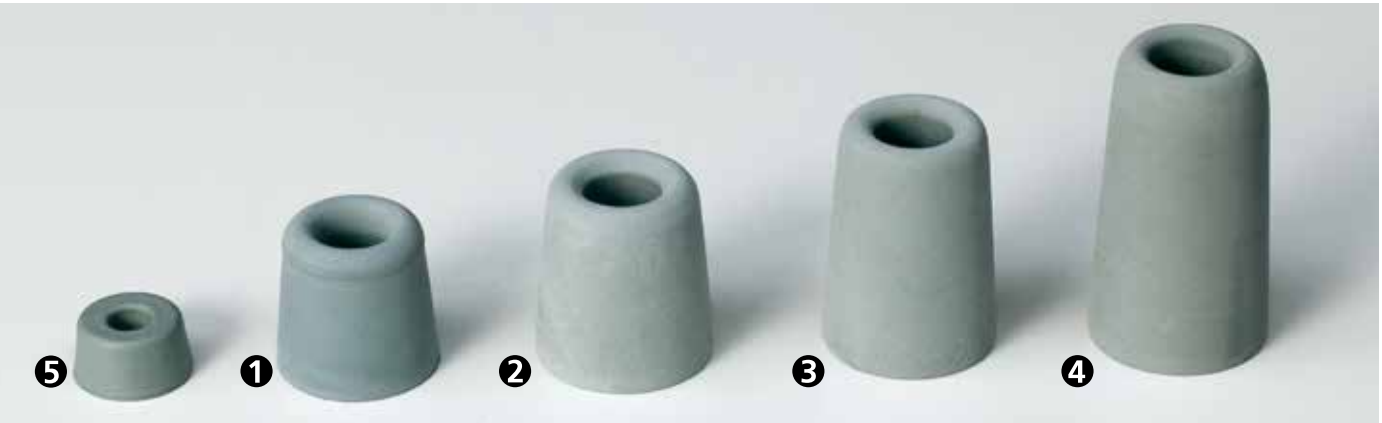


Rubber door stoppers in different sizes to fix to the floor or to the wall. Door handle or window handle buffer to stop wall damage. Rubber wedge to prevent doors from unwanted movement.

Material: Rubber
Colour: Grey

Packing: in neutral polybag with printed header, Euro-hole punched, EAN bar code and recycling symbol.

Items number 1-6 are packed with suitable stainless screw for floor or wall mounting.

Description	Art.-No.	Contents	Price/Pack
1 Door stopper 30 mm	15 820	2 pieces/pack	
2 Door stopper 40 mm	15 821	2 pieces/pack	
3 Door stopper 50 mm	15 822	2 pieces/pack	
4 Door stopper 65 mm	15 823	2 pieces/pack	
5 Rubber Buffer 20 x 10 mm	15 824	5 pieces/pack	
6 Rubber Buffer 24 x 12 mm	15 825	5 pieces/pack	
7 Door wedge 110 mm	15 826	1 piece/pack	
8 Handle buffer	15 827	3 pieces/pack	

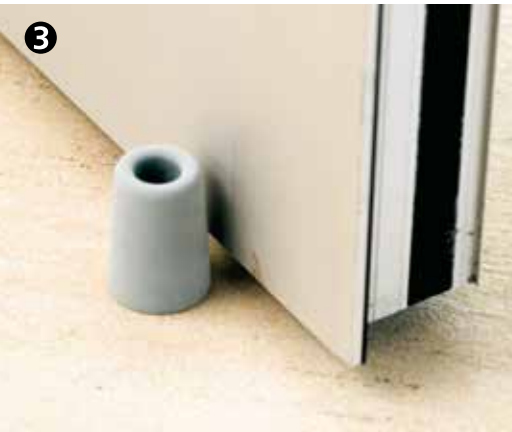

Accoustic Insulation System



Dimensions	Art.-No.	Price p. piece
90 cm x 4.3 cm	15 410	
100 cm x 12 cm	15 411	
100 cm x 22 cm	15 412	


Thickness: 10 / 5 mm
Colour: black

Made of rubber granules with wave profile. Reducing sound by walking to 24db, does not need to be fixed, just laid between battens and floor boards.

Roofing Sheet

Protects roofs and buildings against wetness or dampness. Especially suitable for wooden buildings/underneath roof tiles.

Thickness: 1 mm
Colour: black

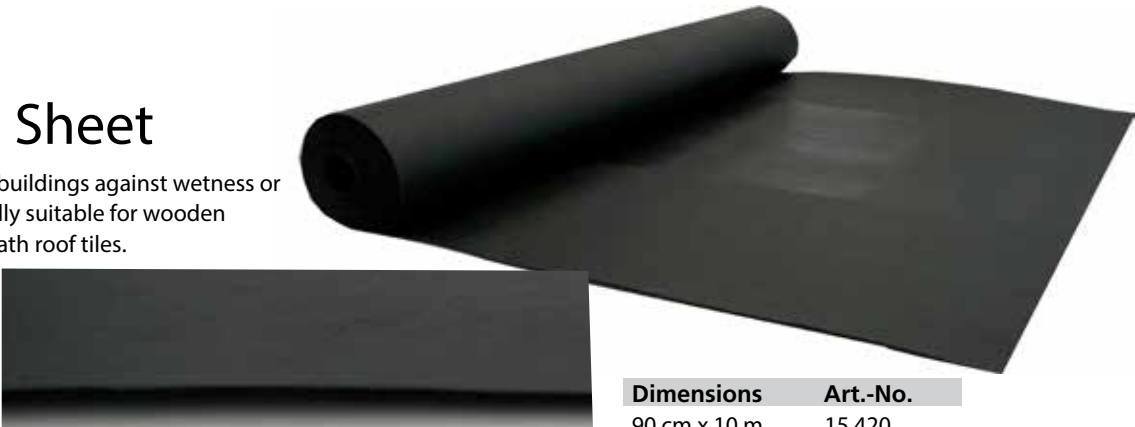

Dimensions	Art.-No.
90 cm x 10 m	15 420



Ceiling System

- Batten fixer acts as a spacer between battens and concrete ceiling.
- Save time and labour „1 pass system“.
- Allows services to pass easily. Batten fixers can be „squashed“.
- Creates a moisture barrier.
- Wires can be carried through the fixers.
- Use around 3 batten fixers per sqm.

Flooring System

Batten a timber floor in half the time. Labour saving product or D.I.Y. Allows services to pass easily. Floating floor, so no drilling or express nails. No piercing of DPC or radon barrier.


- Batten fixers made of rubber allows easy pavement and straightness.
- No „squeaks and creaks“
- Creates a moisture barrier
- Acoustic saddle reducing impact noise by 24dB passing building regulations and NHBC.
- Use around 6 batten fixers per sqm.

Underfloor System

The solution to laying timber floors on underfloor heating. System to allow battens within the under-floor screed so as to be able to „nail“ the floor.

- Greatly reduces chances of timber warping.
- Lay battens easily onto insulation.
- No piercing of insulation.
- Batten fixers given a bridge effect, so you get an even transfer of heat.
- Use around 5 batten fixers per sqm.

Size	Art.-No.	Price p. piece
10 mm	15 400	
15 mm	15 401	

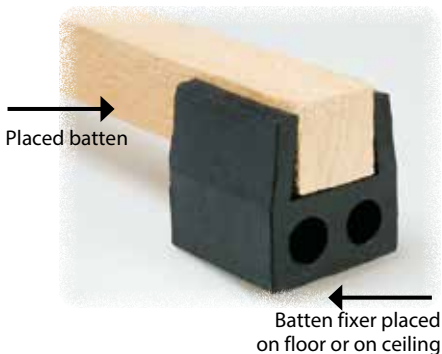

- All ready being used throughout Europe
- Two sizes available: 10 mm and 38 mm
- Batten fixer is used as a replacement to a timber batten, so it is centred the same distances as normal timber battening
- Sound test build regs refer to BS ISO 140-7:1998 and BS ISO 171-2:1996



Sänger GmbH

Zeller Weg 30

74575 Schrozberg / Germany

Tel, + 49 (0) 79 35/72 24 - 0

Fax + 49 (0) 79 35/72 24 - 199

E-Mail: info@sanger.de

<http://www.sanger.de>